



ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/5.15-5.85/6-7.125 GHz
 Gain: 9/11/11 dBi
 Polarization: Vertical
 Horizontal Beamwidth: 30°/15°/12°
 Vertical Beamwidth: 120°/110°/110°
 VSWR: <2.5



MECHANICAL SPECIFICATIONS

Dimensions: 19.3" x 19.3" x 2.44" (490x490x62mm)
 Weight: 2.2 lb (4 kg)
 Installation: Flush Mount to Wall or articulating mount (included)

Radome Material: ASA
 Connector: Right-Angle DART
 Number of Leads: 1 (8-Port DART)
 Cable Length: 36" (910mm)
 Cable Type: ATS-100



ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Indoor/Outdoor
 IP Rating: IP66

WARRANTY

2 Year Limited Warranty



HORIZONTAL

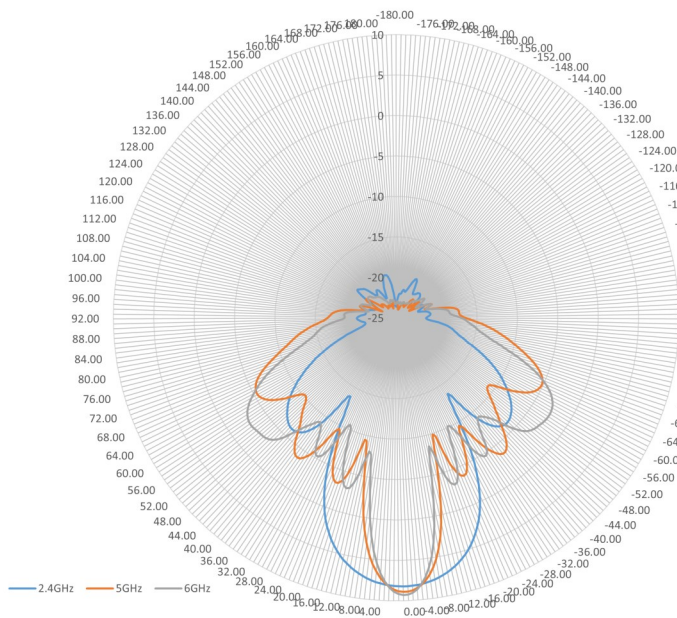

VERTICAL

