



ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.485/5.15-5.85 GHz
Gain: 7/6 dBi
Polarization: Horizontal
Horizontal Beamwidth: 100°/110°
Vertical Beamwidth: 59°/61°



MECHANICAL SPECIFICATIONS

Dimensions: 12.6" x 6.7" x 1.38" (320x170x35mm)
Weight: 1.5 lb (0.68 kg)
Installation: Flush Mount to Wall OR use included Articulating Mount (included)

Radome Material: ABS
Connector: RPSMA
Number of Leads: 5
Cable Length: 36" (910mm)
Cable Type: ATS-200



ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Indoor/Outdoor
Operating Temperature: -40 to 158°F (-40 to 70°C)
Wind Velocity: 134 mph (216 km/h)
IP Rating: IP66

WARRANTY


2 Year Limited Warranty



HORIZONTAL PLANE

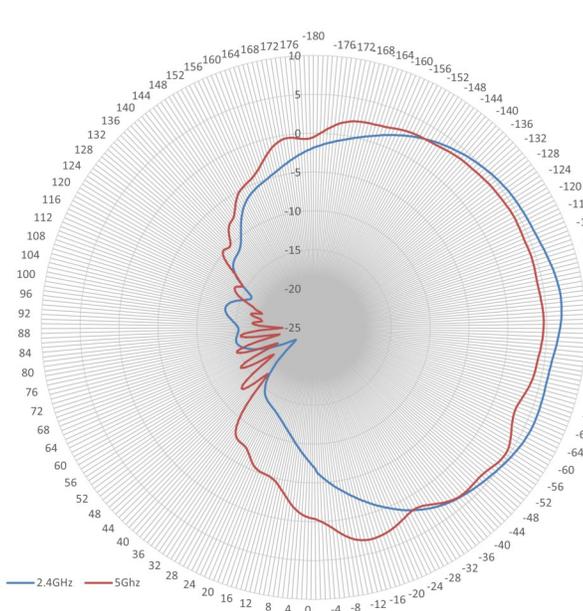

VERTICAL PLANE

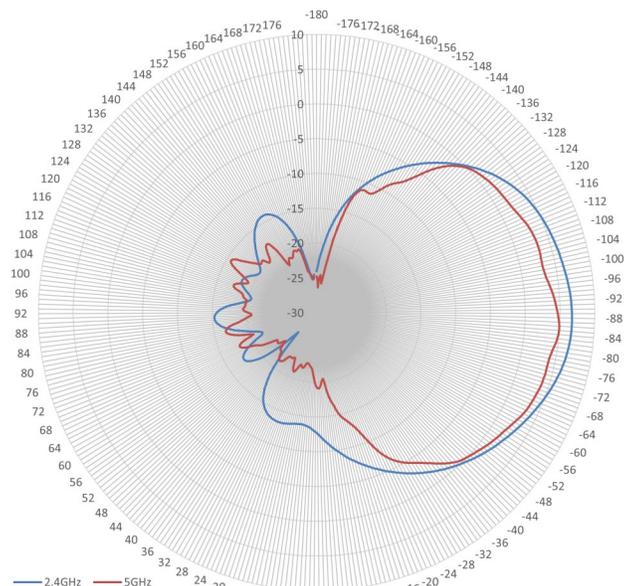



2.4/5 GHZ 6 DBI 5 ELEMENT INDOOR/OUTDOOR PATCH ANTENNA WITH RPSMA ATS-OP-245-7-5RPSP-36

Articulating Mount (included with antenna):

