

WT-5805 H01US

WIRELESS TUNER



The wireless tuner WT-5805 is a PLL-synthesizer controlled double superheterodyne diversity tuner to be used in UHF wireless systems. It employs a compander noise reduction circuit to minimize the influence of the ambient RF noise.

Key features

- Automatic frequency scan
- Integrated squelch function
- Ideally suited for fixed installations such as in event locations, multi-purpose and sports halls, plenary and conference venues, churches, auditoriums etc.
- System always select the stronger of the two antenna signals for further processing
- Setup with up to 16 simultaneously operating receivers possible

Specifications

| | |
|-----------------------|---|
| Power Source | AC mains (Supplied AC adapter must be used) |
| Power Consumption | 200 mA (12 V DC) |
| Receiving Frequency | 576 - 606 MHz, UHF |
| Channel Selection | 64 selectable frequencies |
| Receiving System | Double super-heterodyne |
| Diversity System | Space diversity |
| Mixing Output | MIC/LINE (selectable): -60 dB*1 (MIC)/-20 dB*1 (LINE), 600 Ω Phone jack (unbalanced), 600 Ω XLR-3-32 type connector (balanced) |
| Mixing Input | -20 dB*1, 10 kΩ, unbalanced, phone jack |
| Antenna Input | 75 Ω, BNC (phantom powering for antenna), 9 V DC, 30 mA (max) |
| Receiving Sensitivity | 90 dB or more, Signal to Noise ratio (20 dBμV input, 40 kHz deviation) |
| Harmonic Distortion | 1% or less (typical) |
| Squelch Sensitivity | 16 – 40 dBμV variable |
| Squelch System | Using together of noise SQ, carrier SQ and tone SQ |
| Tone Frequency | 32.768 kHz |
| Indicator | Audio (6 steps), RF (6 steps), ANT A/B, Audio (peak), Battery alarm |
| Channel Check | Usable frequencies scanning |
| Signal to Noise Ratio | 110 dB or more (A-weight, unbalanced output) |
| Frequency Response | 100 Hz – 15 kHz, ±3 dB |
| Operating Temperature | -10°C to +50°C (14°F to 122°F) |
| Operating Humidity | 30 % to 85 %RH |
| Finish | Resin, black |
| Dimensions | 210 (W) x 44 (H) x 205.1 (D) mm (8.27" x 1.73" x 8.07") |
| Weight | 700 g (1.54 lb) |
| Included Accessories | AC adapter x 1, Whip antenna x 2, Rubber foot x 4 |
| Optional Accessories | Mounting bracket kit: MB-WT3 (for rack mounting one WT-5805 unit) , MB-WT4 (for rack mounting two WT-5805 units) |

*Verion | Receiving Frequency

A01 | 692 - 722 MHz, UHF

B01, B02 | 722 - 752 MHz, UHF

C01 - C07 | 794 - 830 MHz, UHF

D01 - D05 | 830 - 865 MHz, UHF

E01 | 668 - 698 MHz, UHF

F01 | 636 - 666 MHz, UHF


G01, G02 | 606 - 636 MHz, UHF

H01 | 576 - 606 MHz, UHF

Note: For Thailand,


B02 | 748.3 - 757.7 MHz, C04 | 803.3 - 805.7 MHz

Dimensions

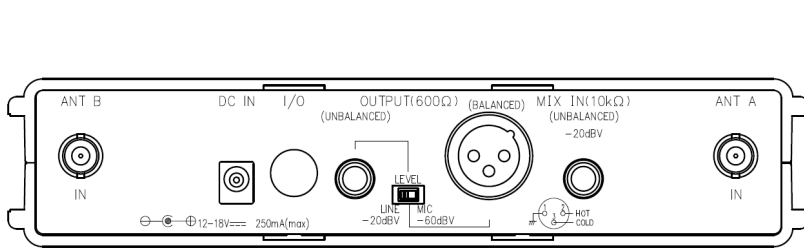

Rear View


210 [8.27"]

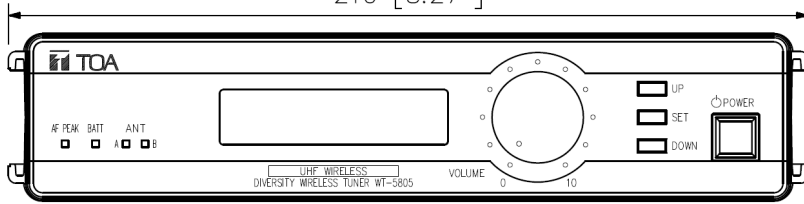

Front View

205.1 [8.07"]

181 [7.13"]

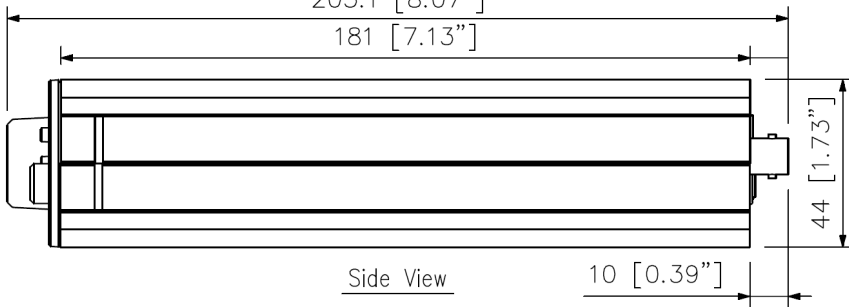

Side View

UNIT:mm

(*3)

| Version | AC Adapter | |
|---------|-----------------------|--|
| US | 120 V AC, 60 Hz | |
| CN | 220 V AC, 50 Hz | |
| UK | 220 - 230 V AC, 50 Hz | |
| ER | 230 V AC, 50 Hz | |
| AS | 240 V AC, 50 Hz | |

Note: No AC adapter is supplied with the version B02ER, C04ER or K01KR.

(*2)

| Version | Receiving Frequency |
|-----------|----------------------|
| A01 | 692 - 722 MHz, UHF |
| B01, B02 | 722 - 752 MHz, UHF |
| C01 - C07 | 794 - 830 MHz, UHF |
| D01 - D05 | 830 - 865 MHz, UHF |
| E01 | 668 - 698 MHz, UHF |
| F01 | 636 - 666 MHz, UHF |
| G01, G02 | 606 - 636 MHz, UHF |
| H01 | 576 - 606 MHz, UHF |
| K01 | 925 - 937.5 MHz, UHF |

Note: For Thailand, B02: 748.3 - 757.7 MHz
C04: 803.3 - 805.7 MHz

A&E specifications

The wireless receiver shall have 64 selectable channels and a built-in scanner function to scan the RF environment and indicate available channels. The receiving method shall be double super-heterodyne using threshold-comparative antenna switching diversity. Specifications shall include a S/N ratio of greater than 110 dB (A-weighted), harmonic distortion of less than 1% and frequency response of 100 - 15k Hz, +/-3 dB. The receiving sensitivity shall be greater than 90 dB with 20 dB μ V input and 40k Hz deviation. Squelch types shall be carrier, noise and tone key with a variable squelch sensitivity of 18 - 40 dB μ V and a 32.768k Hz tone key frequency. The receiver shall have two antenna inputs, each with BNC-type connectors, 75 ohm impedance and 9 VDC, 30 mA, available for remote antennas. The audio outputs shall be balanced type with XLR-M jack and sensitivity of -60 dB / 1 mV, and unbalanced type with 1/4" phone jack and sensitivity of -20 dB / 100 mV, both with an output impedance of 600 ohms. A Mix Input, unbalanced type with 1/4" phone jack with an input impedance of 10k ohms and sensitivity of -20 dBV / 100 mV shall allow the connection of the output of a second receiver or other audio source to be mixed with the main receiver output signal. The front panel shall include an LCD for RF and AF monitoring as well as frequency setting and scanner functions.

Front panel LED's shall include antenna A / B reception status, low battery indication, and an AF peak indicator that lights at 3 dB below clipping. Front panel controls shall include Up, Down, and Set keys for menu navigation as well as Power and Volume.

The wireless receiver shall be powered from the AC mains using a supplied AC-DC adapter with a power consumption of 200 mA (12 VDC). The unit shall operate within a temperature range of -10° C to +50° C (+14° F to +122° F). Unit construction shall be black resin with dimensions (W x H x D) of 210 x 44.6 x 205 mm (8.27" x 1.76" x 8.1") and weight of 700 g (1.54 lbs.). Included accessories shall be two whip antennas and an external AC-DC adapter. Up to two units shall be rack-mountable in one standard 19" rack height with an optional rack-mount kit.