



ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/ 5.1-5.85/ 6-7.125 GHz
 Gain: 4/6/6 dBi
 Polarization: Vertical
 Horizontal Beamwidth: 360°
 Vertical Beamwidth: 105°/75°/75°

VSWR: < 2.0:1
 Isolation: > 20 dB
 Impedance: 50 Ω
 Max Input Power: 100 W



MECHANICAL SPECIFICATIONS

Dimensions: φ 5.7" x 3.13" H (φ 145mm x 79mm H)
 Weight: 0.8 lb (0.4 kg)
 Installation: Threaded Bolt with Nut and Wall/Pole Mount (included)
 Installation Hole Diameter: 1.14" (29mm)
 Pole Mount Diameter: 2" (50mm)

Radome Material: ASA
 Connector: N-Style Plug
 Number of Leads: 4
 Cable Length: 36" (910mm)
 Cable Type: ATS-200



ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Indoor/Outdoor
 Operating Temperature: -40°F to 149° F (-40° C to 65° C)
 Wind Velocity: 130 mph (210 km/h)

WARRANTY

2 Year Limited Warranty



HORIZONTAL

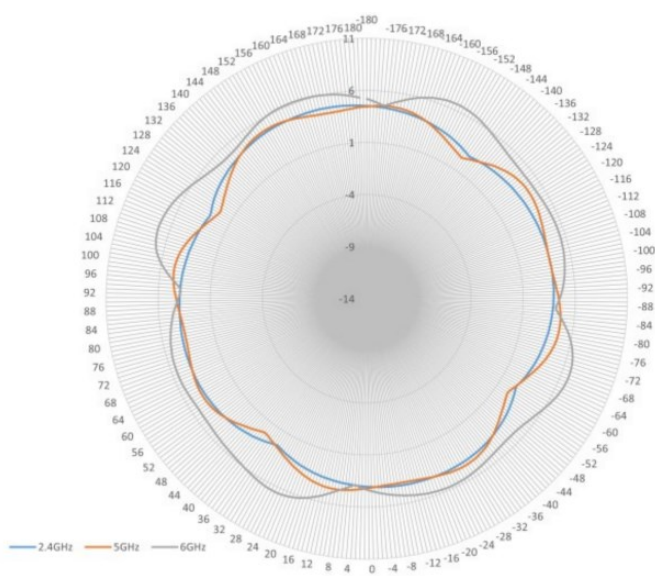

VERTICAL

