


N0032A



Switching amplifiers for Namur sensors

NV1221/115VAC/RL/1D/1G

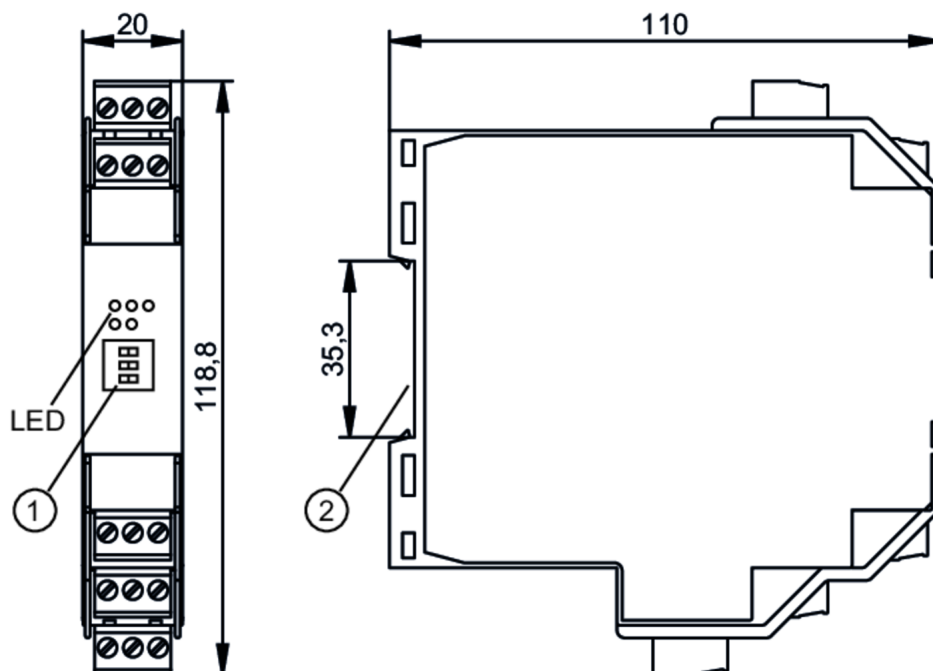

- 1 selector switch
2 Mounting on DIN rail



Application

Design	housing for DIN rail mounting
Application	short-circuit monitoring; Wire break monitoring

Electrical data

Operating voltage tolerance	[%]	-10...10
Operating voltage	[V]	115 AC
Power consumption	[W]	1.3
Number of channels		2

Outputs

Electrical design		Relay; (per channel: 1 changeover contact)
Contact rating		253 V AC / 2 A / cos phi > 0,7 // 40 V DC / 2 A; (resistive load)
Switching frequency AC	[Hz]	10

Operating conditions

Ambient temperature	[°C]	-20...60
Protection		IP 20

Tests / approvals

Approval	PTB 02 ATEX 2035; TIIS TC16048; IECEx PTB 17.0023	
ATEX marking	II (1) G [Ex ia Ga] IIC II (1) D [Ex ia Da] IIIC	
EMC	EN 50081-2	(1993)
	EN 61326-1	(2006)

N0032A



Switching amplifiers for Namur sensors

NV1221/115VAC/RL/1D/1G

MTTF	[years]	458
Mechanical data		
Weight	[g]	230.45
Housing		rectangular
Type of mounting		Mounting on DIN rail; (TH35 (EN 60715))
Dimensions	[mm]	118.8 x 20 x 110
Switching cycles mechanical		10 million
Displays / operating elements		
Display	Switching status	2 x LED, yellow
	Power	LED, green
	Function	2 x LED, red
Remarks		
Remarks	Caution The control monitor must be mounted outside the hazardous area.	
	Free terminals must not be used.	
Pack quantity		1 pcs.




Switching amplifiers for Namur sensors

NV1221/115VAC/RL/1D/1G

Electrical connection

terminals: ...2.5 mm²

Connection

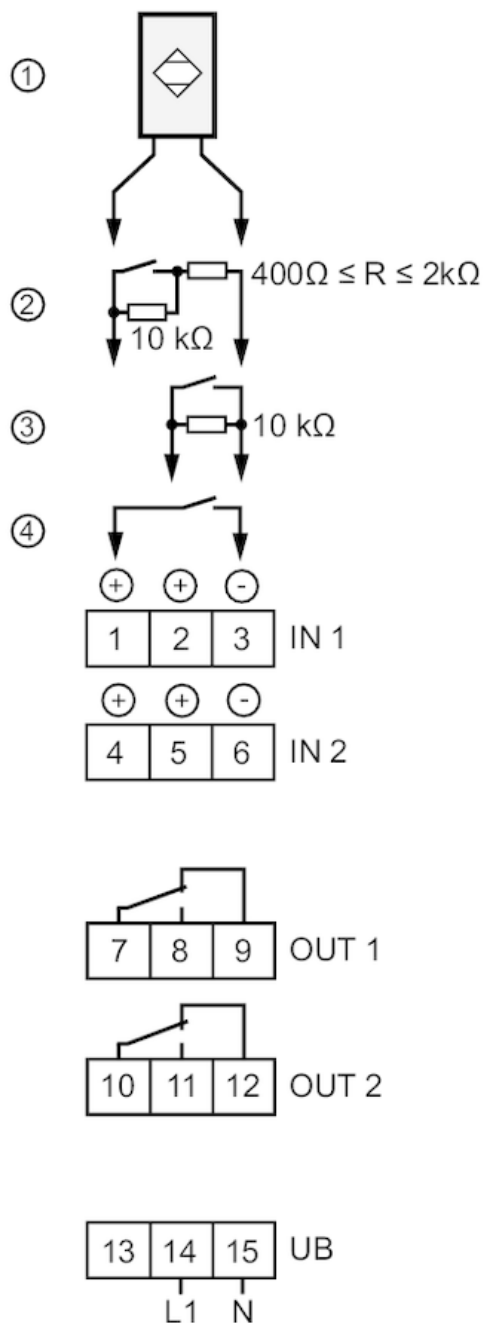

N0032A



Switching amplifiers for Namur sensors

NV1221/115VAC/RL/1D/1G

Other data

Maximum values for control circuit

in protection rating intrinsic safety	[EEx ia] IIC	[EEx ia] IIB	[EEx ib] IIC	[EEx ib] IIB
Voltage [V]	10.6	10.6	10.6	10.6
Current [mA]	19.1	19.1	19.1	19.1
Power [mW]	51	51	51	51
External inductance [mH]	97	390	97	390
External capacitance [μ F]	2.32	16.2	2.32	16.2