
Autel ASR Radar Specification

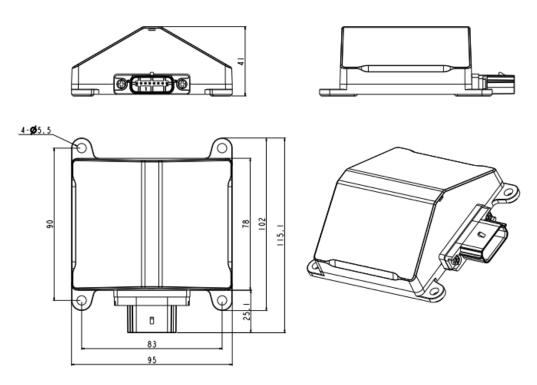

Performance parameters:

t criormance parameters.		
working frequency	76-77GHz	
Maximum detection range	±80 m (vehicle) ±40 m (pedestrian/bicycle)	
working mode	slow speed	High speed
minimum detection range	0.25m	0.9m
distance resolution	0.31 m	0.96 m
distance accuracy	±0.16m	±0.5m
speed range	±60km/h	±150km/h
speed accuracy	±0.43km/h	
speed resolution	0.86km/h	
horizontal angle	180°	
angular accuracy	±0.8°	

General parameters:

size	115mm x 95mm x 41mm
weight	2 30g
power consumption	6.5W
communication interface	CAN2.0, CAN_FD

	8V - 32V;	
operating voltage _	Passenger car 12V,	
	Commercial vehicle 24V	
operating temperature _	-40°C ~ 85°C	
storage temperature	-40°C~105°C	
installation angle redundancy	-2°~2°	
protection rating _	IP69K	
operating cycle	60ms	