


OF5051



Retro-reflective sensor

OFR-FNKG/US-100

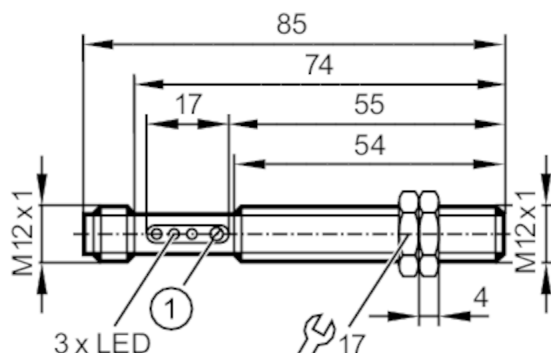

1 potentiometer



Product characteristics

Type of light	Infrared light
Housing	Threaded type

Application

System	Function check output
Function principle	Retro-reflective sensor

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 35
Protection class		II
Reverse polarity protection		yes
Type of light		Infrared light
Wave length	[nm]	880

Outputs

Electrical design		NPN
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes
Max. voltage drop of function check output	[V]	3.5
Max. current load for function check output	[mA]	10
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	320
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range

Range referred to prismatic reflector	[m]	0.05...2; (Prismatic reflector Ø 80 E20005)
---------------------------------------	-----	---

OF5051



Retro-reflective sensor

OFR-FNKG/US-100

Range adjustable	yes
Max. light spot diameter [mm]	140
Light spot dimensions refer to	at maximum range

Operating conditions

Ambient temperature [°C]	-25...60
Protection	IP 65

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B
MTTF [years]	601	
UL approval	Ta	< 40 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	UL approval number	E030
	File number UL	E174191

Mechanical data

Weight [g]	40.6	
Housing	Threaded type	
Dimensions [mm]	M12 x 1 / L = 74	
Thread designation	M12 x 1	
Material	brass nickel-plated	
Lens material	PMMA	

Displays / operating elements

Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Function	1 x LED, red

Accessories

Items supplied	lock nuts: 2
	screwdrivers

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A






Retro-reflective sensor

OFR-FNKG/US-100

Connection

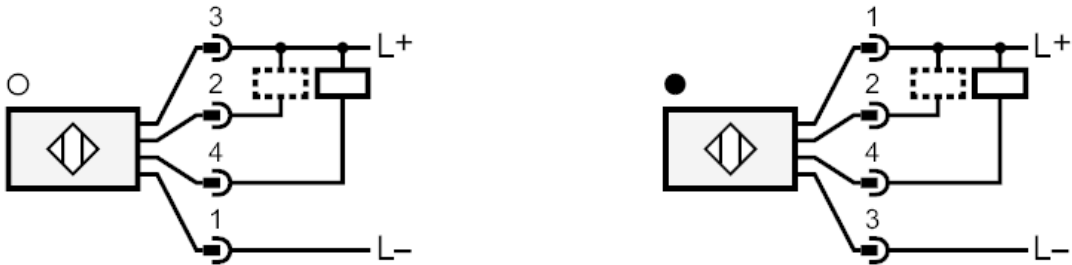

2 Function check output

Diagrams and graphs

excess gain graph

