



**canfield
connector**

CANFast[®]
round connectors

M8 SERIES
8MM STRAIGHT
MOLDED
ROUND CONNECTORS

GENERAL DESCRIPTION

Canfield Connector is known for its robust connections with an American twist, and the CANFAST[®] brand of M8 electrical connectors are no exception. This family of robust, all molded anti-vibration electrical connectors for sensors and actuators are specified by those needing a sure connection to valves, sensors, or automation of all types. Available in all industry styles including shielded and unshielded, and in various wire lengths. The CANFAST[®] round connectors are made in the USA to strict quality standards and are ready for fast delivery.




Male 4-Pin version shown above


DIMENSIONAL DATA

All dimensions are in millimeters unless otherwise noted.

MALE

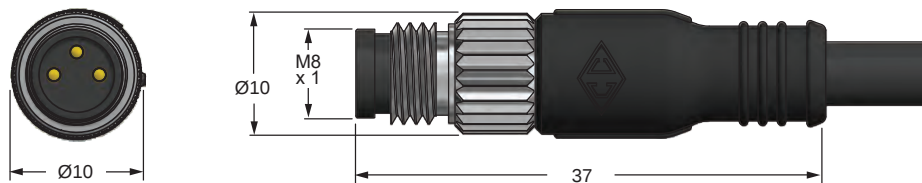

FEMALE

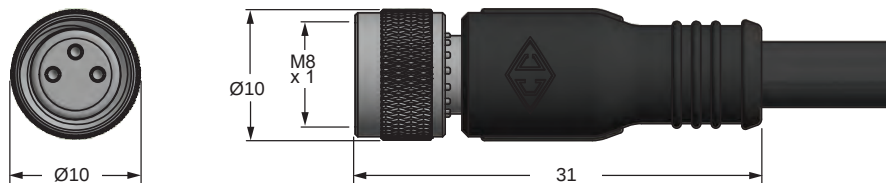

PIN CONFIGURATION

3 Pin

Male



Female



Pin 1 = Brown
Pin 3 = Blue
Pin 4 = Black

4 Pin

Male



Female



Pin 1 = Brown
Pin 2 = White
Pin 3 = Blue
Pin 4 = Black

TECHNICAL DATA

Current Max.	4 Amps
Voltage Max.	120V AC/DC
Materials	Housing: PA, TPU Nut: Nickel Plated Brass Contacts: Gold Plated Brass
Temperature Range	-20° to +80°C
Environmental Protection	IP 68, IP 69 (Securely connected)
Cable Diameter	5.0mm
Cable Type	PVC, PUR
Wire Gauge	24 AWG
Coding	A - Standard

ORDERING INFORMATION

Consult Factory for stock availability.

M8 MALE STRAIGHT MOLDED LOCKING

Length	Wire Type	3 Pin	4 Pin
1 meter	PVC	RC08-AMM030-0110C10A	RC08-AMM040-0110C10A
	shielded	RC08-AMM030-0110S10A	RC08-AMM040-0110S10A
	PUR	RC08-AMM030-0110R10A	RC08-AMM040-0110R10A
	shielded	RC08-AMM030-0110P10A	RC08-AMM040-0110P10A
2 meter	PVC	RC08-AMM030-0120C10A	RC08-AMM040-0120C10A
	shielded	RC08-AMM030-0120S10A	RC08-AMM040-0120S10A
	PUR	RC08-AMM030-0120R10A	RC08-AMM040-0120R10A
	shielded	RC08-AMM030-0120P10A	RC08-AMM040-0120P10A
3 meter	PVC	RC08-AMM030-0130C10A	RC08-AMM040-0130C10A
	shielded	RC08-AMM030-0130S10A	RC08-AMM040-0130S10A
	PUR	RC08-AMM030-0130R10A	RC08-AMM040-0130R10A
	shielded	RC08-AMM030-0130P10A	RC08-AMM040-0130P10A
5 meter	PVC	RC08-AMM030-0150C10A	RC08-AMM040-0150C10A
	shielded	RC08-AMM030-0150S10A	RC08-AMM040-0150S10A
	PUR	RC08-AMM030-0150R10A	RC08-AMM040-0150R10A
	shielded	RC08-AMM030-0150P10A	RC08-AMM040-0150P10A
10 meter	PVC	RC08-AMM030-010AC10A	RC08-AMM040-010AC10A
	shielded	RC08-AMM030-010AS10A	RC08-AMM040-010AS10A
	PUR	RC08-AMM030-010AR10A	RC08-AMM040-010AR10A
	shielded	RC08-AMM030-010AP10A	RC08-AMM040-010AP10A

M8 FEMALE STRAIGHT MOLDED LOCKING

Length	Wire Type	3 Pin	4 Pin
1 meter	PVC	RC08-AFM030-0110C10A	RC08-AFM040-0110C10A
	shielded	RC08-AFM030-0110S10A	RC08-AFM040-0110S10A
	PUR	RC08-AFM030-0110R10A	RC08-AFM040-0110R10A
	shielded	RC08-AFM030-0110P10A	RC08-AFM040-0110P10A
2 meter	PVC	RC08-AFM030-0120C10A	RC08-AFM040-0120C10A
	shielded	RC08-AFM030-0120S10A	RC08-AFM040-0120S10A
	PUR	RC08-AFM030-0120R10A	RC08-AFM040-0120R10A
	shielded	RC08-AFM030-0120P10A	RC08-AFM040-0120P10A
3 meter	PVC	RC08-AFM030-0130C10A	RC08-AFM040-0130C10A
	shielded	RC08-AFM030-0130S10A	RC08-AFM040-0130S10A
	PUR	RC08-AFM030-0130R10A	RC08-AFM040-0130R10A
	shielded	RC08-AFM030-0130P10A	RC08-AFM040-0130P10A
5 meter	PVC	RC08-AFM030-0150C10A	RC08-AFM040-0150C10A
	shielded	RC08-AFM030-0150S10A	RC08-AFM040-0150S10A
	PUR	RC08-AFM030-0150R10A	RC08-AFM040-0150R10A
	shielded	RC08-AFM030-0150P10A	RC08-AFM040-0150P10A
10 meter	PVC	RC08-AFM030-010AC10A	RC08-AFM040-010AC10A
	shielded	RC08-AFM030-010AS10A	RC08-AFM040-010AS10A
	PUR	RC08-AFM030-010AR10A	RC08-AFM040-010AR10A
	shielded	RC08-AFM030-010AP10A	RC08-AFM040-010AP10A