

Reolink Duo Floodlight WiFi

4K Dual-Lens WiFi IP Camera with Floodlights and Panoramic View

- Dual Lens
- Dual-Band WiFi
- 4K 180° Panorama
- Powerful Floodlights


Specifications

Video & Audio	
Image Sensor	1/2.7" CMOS Sensors
Resolution	4608x1728(8 Megapixels) @20fps
Lens	f=3.2mm fixed, F=2.0
Video Format	H.265
Field of View	Horizontal: 180°; Vertical: 60°
Infrared Night Vision	Up to 30 meters (100ft); LED: 14pcs/ 20mil/850nm
Color Night Vision	Floodlight: 40pcs SMD LEDs/15W/ 4200K/1800 Lumens
Frame Rate	2fps - 20fps(Default: 20fps)
Code Rate	Main stream: 3072Kbps - 10240Kbps(Default: 5120Kbps); Sub stream: 256Kbps - 2048Kbps(Default: 1024Kbps)
Audio	Two-way audio
Power Requirements	

DC Power	AC 100V~240V, 50~60Hz; DC 13V $\frac{1}{3}$ 2A
Interface	
Power Port	DC power port
Reset Button	YES
microSD Card Slot	Supports max. 512GB microSD card
Audio In/Out	Built-in microphone and speaker
Wi-Fi	
Wireless Standard	IEEE 802.11 ac/ax/a/b/g/n
Operating Frequency	2.4 GHz/5 GHz
Wireless Security	WPA/WPA2/WPA3
Software	
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
User Access	Max. 20 users (1 admin & 19 users); Max. 12 simultaneous streams (2 main & 10 sub streams)
Other Features	
Smart Alarm	Motion detection; Person/vehicle/ animal detection
Record Mode	Motion-triggered recording (Default); Scheduled recording
Time Lapse	YES
Smart Home Compatibility	Google Assistant
Working Environment	
Operating Temperature	-10°C~+55°C (14°F~131°F)
Operating Humidity	10% ~ 90%
Weatherproof	IP67

Mechanical	
Dimensions	195x 103x 56 mm
Weight	1.25kg
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/


Gallery & Specs

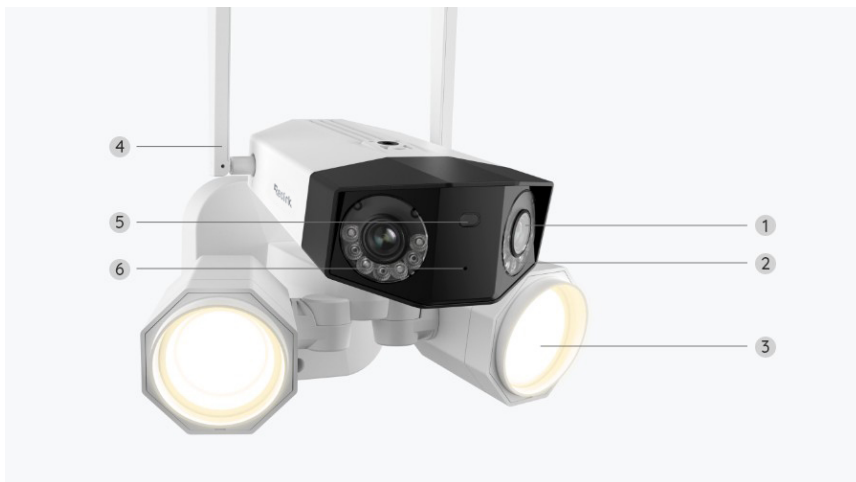

1. Lens
2. IR LED
3. Floodlight
4. Antenna
5. Daylight Sensor
6. Mic



1. microSD Card Slot
2. Reset Button
3. Speaker
4. Mount

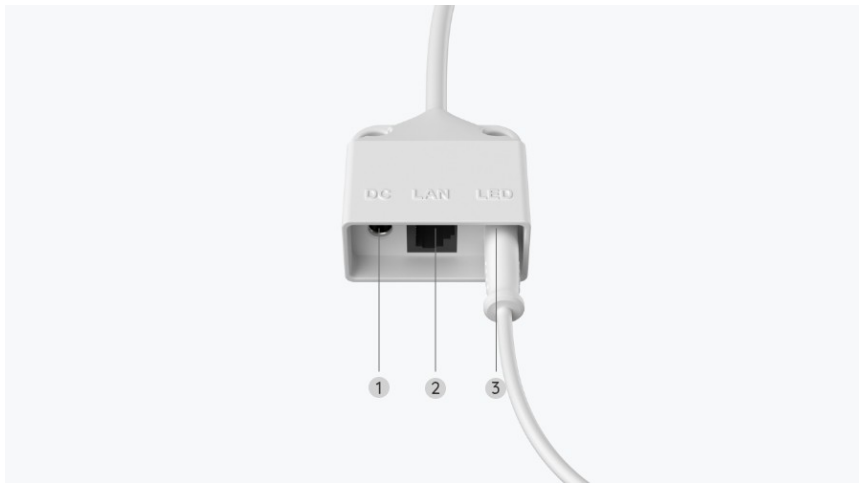

1. DC Power Port
2. LAN Port
3. Charging Port for the Floodlight



You can adjust the floodlights in any direction, even after fixing the camera.

