


## D-922F

### MIC/LINE INPUT MODULE

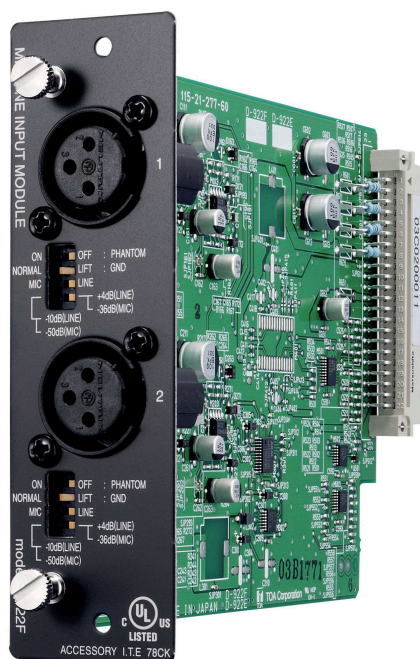

The D-922F is a 2-channel microphone/line input module designed for use with the D-901 Digital Mixer, etc. It is equipped with XLR connectors. The D-901's 4-pole DIP switch is used to set the input sensitivity, phantom power supply, and ground lifting.

### Key features

- 2-channel microphone/line input module
- Equipped with XLR connectors


## Specifications

\* 0 dB = 0.775 V


Input 2 channels, -50/-36/-10/+4 dB\* (Selectable with the DIP switch.),  
 4.7 k $\Omega$ , electronically-balanced, equivalent to XLR-3-31 type  
 Phantom power supply (can be set with the DIP switch)  
 15 V: D-901 (option), DP-K1 (option), D-2008SP (option)  
 12 V: SX-2100AI (option)  
 Ground lift switch (can be set with the DIP switch)

A/D Converter	20 bit
Sampling Frequency	48 kHz
Frequency Response	20 Hz - 20 kHz, $\pm 1$ dB (+4 dB* input)
Dynamic Range	85 dB (IHF-A weighted) or more (+4 dB* input)
Total Harmonic Distortion	0.2 % or less (+4 dB* input)
Finish	Panel: Pre-coated steel plate, black, 30 % gloss
Dimensions	35 (W) x 119.5 (H) x 178.4 (D) mm
Weight	135 g


# Dimensions

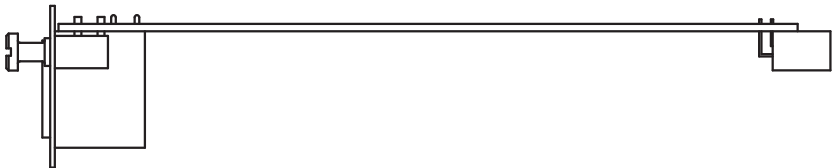

Top View

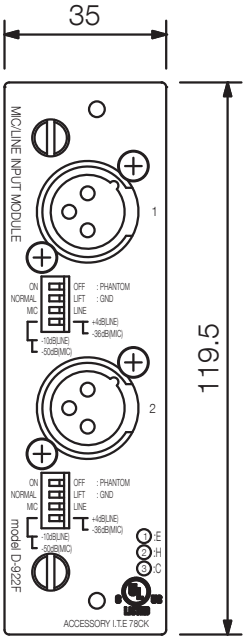

Front View

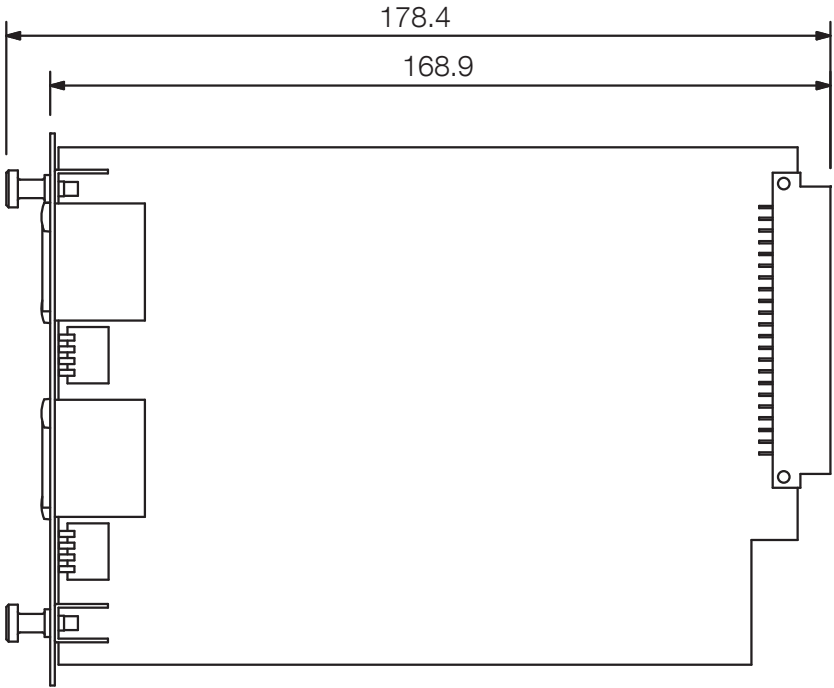

Side View

UNIT:mm

SCALE:1/2

## A&E specifications

Input module with two balanced audio inputs. 3-pin XLR jacks for input. Sensitivity and phantom power adjustable on the panel, ground-lift switch.