

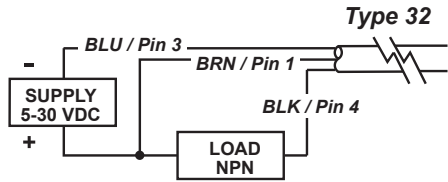

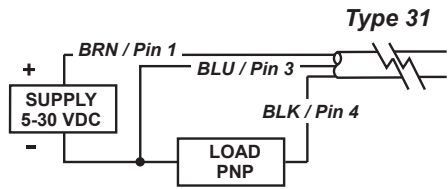

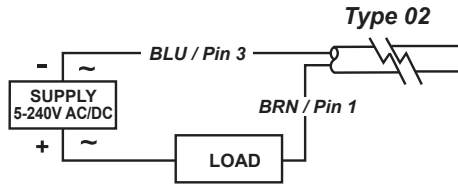


SERIES 9U TYPE 02, 31 & 32

Wiring Diagram







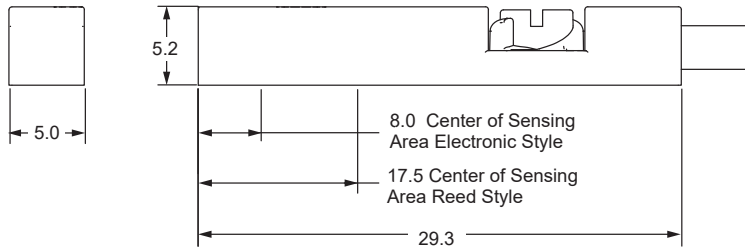


Switch Type	Description	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop	Magnetic Sensitivity
02	Reed Switch with Red LED	Normally Open SPST	5 - 240V AC/DC	0.1 Amps Max.	10 watts Max.	2.65 Volts @ 100mA DC	60 Ga.
31	Electronic for Reed Magnet, Grn LED & Sourcing	Normally Open PNP	5 - 30 VDC	0.1 Amps Max.	3 watts Max.	0.5 Volts @ 100mA	40 Ga.
32	Electronic for Reed Magnet, Red LED & Sinking	Normally Open NPN	5 - 30 VDC	0.1 Amps Max.	3 watts Max.	0.5 Volts @ 100mA	40 Ga.

*Minimum Gauss rating required for proper operation as measured on sensor surface.

SERIES 9U TYPE 02, 31 & 32

Wiring Diagram

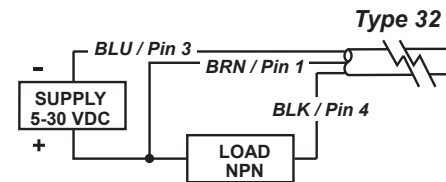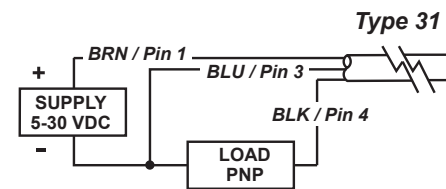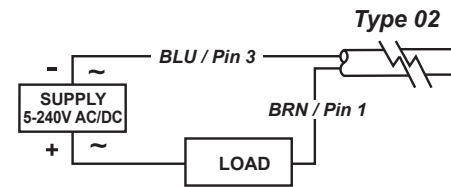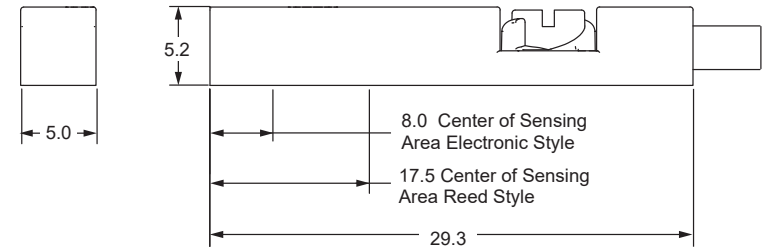

Switch Type	Description	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop	Magnetic Sensitivity
02	Reed Switch with Red LED	Normally Open SPST	5 - 240V AC/DC	0.1 Amps Max.	10 watts Max.	2.65 Volts @ 100mA DC	60 Ga.
31	Electronic for Reed Magnet, Grn LED & Sourcing	Normally Open PNP	5 - 30 VDC	0.1 Amps Max.	3 watts Max.	0.5 Volts @ 100mA	40 Ga.
32	Electronic for Reed Magnet, Red LED & Sinking	Normally Open NPN	5 - 30 VDC	0.1 Amps Max.	3 watts Max.	0.5 Volts @ 100mA	40 Ga.

*Minimum Gauss rating required for proper operation as measured on sensor surface.