

ZM-9001

ZONE MANAGER



The ZM-9001 is a remote control switch panel used with the 9000 series amplifiers. It provides an additional 6 control inputs of amplifier expansion, and can be mounted in standard 1-gang electrical box in the wall.

Key features


- 6 buttons to activate preset selection or volume up/down
- Wiring: single conductor shielded cable
- Max. loop resistance: 50 Ω per line
- Mounting in one gang electrical box
- Maximum 2 remote panels per chassis

Specifications

Line Resistance	50 Ω or less (per line)
Cable Requirements	Single conductor shielded cable
Terminal	M3 screw terminal, distance between barriers: 7.62 mm
Operating Temperature	-10 °C to +40 °C (14 °F to 104 °F)
Finish	Surface-treated steel plate, white, paint
Dimensions	72 (W) x 127 (H) x 45 (D) mm
Weight	170 g
Included Accessories	Box mounting screw (No.6-32UNC x 30) ...2, Box mounting screw (M4 x 30) ...2, Panel mounting screw ...2

Note: Since no electrical box is supplied with the unit, prepare it separately.


Dimensions

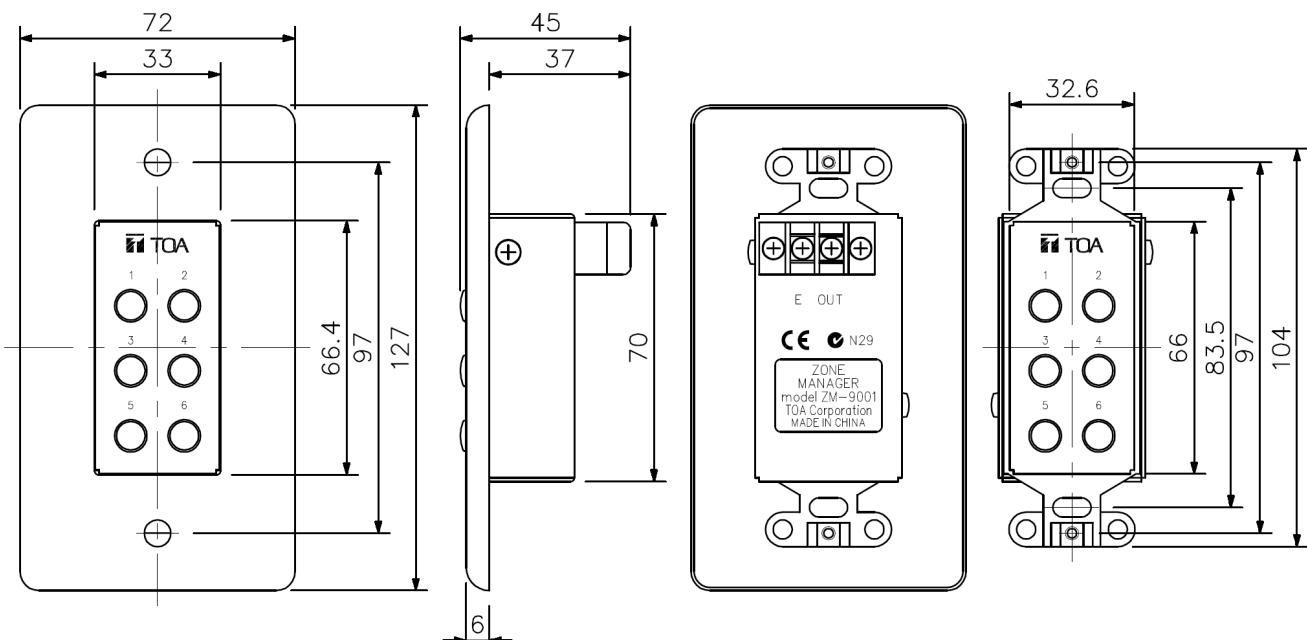

Front View

Side View

Rear View

Front View
without panel

Bottom View

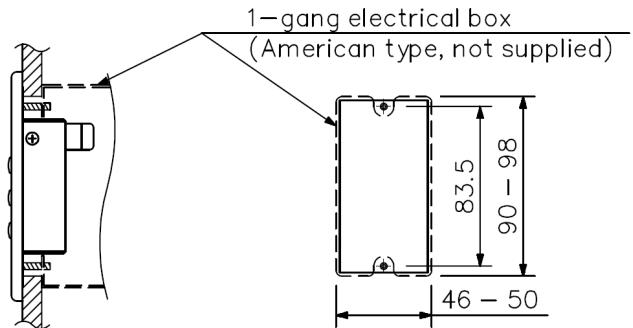


Figure when mounted

Dimensions of mounting opening

If the opening is too small or too large, the ZM-9001 cannot be mounted in the wall. Be sure to make an opening with dimensions given above when mounting.

UNIT: mm SCALE: 1/2

A&E specifications

Remote control unit for fully digital mixer M-9000. Six free programmable button for retrieving by default, volume settings, or the choice of signal sources. Wiring with single conductor shielded cable. Simple flush-mounted installation.

Height: 12,7 cm

Depth: 5,6 cm

Width: 7,2 cm