


5MP HDCVI Security System

Twelve (12) 5MP HDCVI Eyeball Cameras with One (1) 16-channel Analytics+ 4K HDCVI DVR

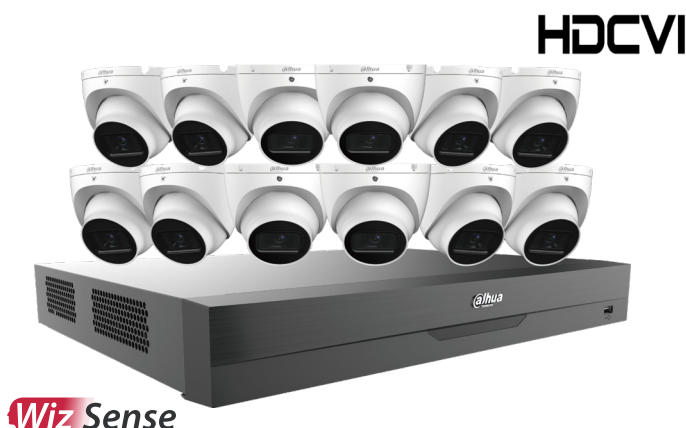

WizSense Series devices combine Dahua's powerful Analytics+ with an intuitive and easy to use interface. WizSense devices offer Smart Motion Detection and Perimeter Protection functions that focus on human and vehicular images and ignore irrelevant images to capture important video while reducing false alarms. WizSense Series devices provide powerful general security for small to medium size businesses at a sensible price.

System Overview

The Dahua HDCVI Security System provides the components to quickly install a video security solution. The HDCVI cameras offer the clarity of 5MP video with a 16:9 aspect ratio, and the HDCVI DVR offers built-in motion detection algorithms, alarm triggers, and customized recording modes. The cameras and the HDCVI DVR supports multiple video outputs making the kit compatible with many existing systems. The kit features Dahua's HDCVI technology that leverages an existing coaxial infrastructure, saving time and costs from running networking and power cables.

Functions

Perimeter Protection

Dahua Analytics+ includes Tripwire and Intrusion functions that offer custom tripwires based on object type for automation in limited access areas. Perimeter Protection requires less pixels to detect an object to deliver improved accuracy and decreased false alarms due to lights, weather, trees, or animals.

Smart Motion Detection

The Smart Motion Detection, a component of Dahua's Analytics+ technology, improves alarm accuracy and decreases the number of false alarms. The advanced SMD algorithm analyzes a scene for human or vehicle motion, while filtering out other motion due to trees, leaves, animals, weather, and triggers an alarm when detected.

AI Coding

The AI Coding function puts recording emphasis on human or vehicular objects in the video scene. This technology, based on constant bit rate (CBR), dynamically allocates increased bit rate to the target object while reducing the bit rate allocated to background objects. AI Coding reduces bit rate and storage requirements by up to 50% when compared to the H.265 video compression standard.

HDCVI Cameras

- 1/2.7-in. 5MP Progressive-scan CMOS Sensor
- 5MP at 25 fps Maximum Resolution, 2.8 mm Fixed Lens
- 16:9 Aspect Ratio for no Image Stretching
- Maximum IR Length 30 m (98.43 ft), Smart IR
- IP67 Ingress Protection

HDCVI DVR

- 4 TB Pre-installed Hard Disk Drive
- 16-Channel Penta-brid Recorder, Dual-streaming
- Smart H.265+ and Smart H.264+ Dual Codec
- 5MP at 12 fps or 4K at 7 fps Recording Resolution on All HDCVI Channels
- AI Coding Technology for High-quality Human/Vehicle Video
- Perimeter Protection and Smart Motion Detection (SMD)

Flexible Recording

The HDCVI DVR offers a variety of configurable recording options and schedules that saves HDD space and active monitoring time. The HDCVI DVR monitors incoming video and can be programmed to record if motion is detected or if an alarm is triggered. The HDCVI DVR can also be programmed to record on a schedule or at different intervals. The recording options and schedules can be set for each individual camera or copied to all cameras.

Long Distance Transmission

HDCVI technology guarantees real-time transmission over long distances without loss of video quality. HDCVI devices provide the same resolution as most IP network camera systems using existing RG-59, RG-6, or CAT 6 UTP cabling.

Multi-format Support

The camera and HDCVI DVR supports multiple video formats including, HDCVI, CVBS, AHD, and TVI. The camera can switch between these four formats via the OSD menu or the switch located on the video output cable making the camera compatible with not only HDCVI DVRs but also most existing HD/SD DVRs. The HDCVI DVR automatically recognizes the incoming signals of each attached camera without any setup, making installation easy and operation convenient.

Environmental

With a temperature range of -40°C to $+60^{\circ}\text{C}$ (-40°F to $+140^{\circ}\text{F}$), the cameras are designed for extreme temperature environments. The cameras, subjected to rigorous dust and water immersion tests, are certified to the IP67 rating making them suitable for demanding outdoor applications.

The HDCVI DVR features an operating temperature of -10°C to $+55^{\circ}\text{C}$ ($+14^{\circ}\text{F}$ to $+131^{\circ}\text{F}$).

Technical Specification

A51BJ02 5MP HDCVI Eyeball Camera

Camera	
Image Sensor	1/2.7-in. CMOS Sensor
Effective Pixels	2880 (H) x 1620 (V), 5MP
Aspect Ratio ¹	16:9
Scanning System	Progressive
Electronic Shutter Speed	1/30 s to 1/100,000 s
Minimum Illumination	Color: 0.01 lux at F1.6, 30 IRE 0 lux with IR on
S/N Ratio	More than 65 dB
IR Distance	Up to 30.0 m (98.43 ft)
IR On/Off Control	Auto, Manual
IR LEDs	One (1)

Lens	
Lens Type	Fixed-focal
Mount Type	M12
Focal Length	2.8 mm
Maximum Aperture	F1.6
Angle of View	Horizontal: 111° Vertical: 58° Diagonal: 132°
Close Focus Distance	900.0 mm (35.43 in.)

Installation Angle	
Range	Pan: 0° to 360° Tilt: 0° to 78° Rotation: 0° to 360°

DORI Distances ²			
Detect (8 ppf)	Observe (19 ppf)	Recognize (38 ppf)	Identify (76 ppf)
63.60 m (208.70 ft)	25.40 m (83.30 ft)	12.701 m (41.70 ft)	6.40 m (21.0 ft)

1. To view the 16:9 video output on a Dahua HDCVI DVR you must update the DVR to the latest firmware. Obtain the latest firmware on the Dahua Wiki at <https://dahuawiki.com/Recorders>.

2. The DORI distance is a measure of the general proximity for a specific classification to help pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specifications and lab test results according to EN 62676-4 , the standard that defines the criteria for the Detect, Observe, Recognize and Identify classifications.

3. Transmission distance results verified by real-scene testing in Dahua's test laboratory. Actual transmission distances may vary due to external influences, cable quality, and wiring structures.

Video		
Resolution		5MP (2880 x 1620), 4MP (2560 x 1440), 1080p (1920 x 1080), 960H (960 x 480)
Maximum Frame Rate	HDCVI	5MP at 25 fps, 4MP at 30 fps, 1080p at 30 fps
	AHD	4MP at 30 fps
	TVI	4MP at 30 fps
	CVBS	960H
Video Output		One (1) BNC Output, HDCVI, AHD, TVI, CVBS switchable
Video Transmission ³	RG-59/U Coax	720p: 800 m (2624.67 ft) 1080p: 500 m (1640.42 ft) 5MP: 500 m (1640.42 ft)
	RG-6/U Coax	720p: 1200 m (3937.01 ft) 1080p: 800 m (2624.67 ft) 5MP: 700 m (2296.59 ft)
	CAT 6 UTP (balun required)	720p: 450 m (1476.38 ft) 1080p: 300 m (984.25 ft) 5MP: 300 m (984.25 ft)
Day/Night		Auto (ICR)
OSD Menu		Multi-language
BLC Mode		BLC, HLC, DWDR
WDR		Digital WDR
Gain Control		Auto, Manual
Noise Reduction		2D NR
White Balance		Auto, Manual
Smart IR		Auto, Manual

Certifications	
Safety	UL60950-1 CAN/CSA C22.2 No.60950-1
Electromagnetic Compatibility (EMC)	FCC CFR 47 Part 15 subpart B, ANSI C63.4-2014, EN55032:2015, EN 61000-3-2:2014, EN 61000-3-3:2013, EN55024:2010+A1:2015, EN 55035:2017, EN50130-4:2011+A1:2014, EN 62368-1:2014+A11:2017

Electrical	
Power Supply	12 VDC ± 30%
Power Consumption	Maximum 3.2 W (12 VDC, IR on)

Environmental	
Operating Conditions	−40° C to +60° C (−40° F to +140° F) Less than 95% RH
Storage Conditions	−40° C to +60° C (−40° F to +140° F) Less than 95% RH
Ingress Protection	IP67

Construction	
Casing	Metal
Dimensions	ø94.0 mm x 85.60 mm (ø3.70 in. x 3.37 in.)
Net Weight	0.31 kg (0.68 lb)
Gross Weight	0.44 kg (0.97 lb)

Technical Specification		
X82B3A4 16-channel HDCVI DVR with Analytics+		
System		
Main Processor		Embedded Processor
Operating System		Embedded LINUX
Analytics+ Perimeter Protection ^{4,5}		
Performance		- Human and Vehicle object classification - Decreased false alarms from leaves, lights, animals - Configure function on two (2) channels, or configure function on one (1) channel to use eight (8) channels for SMD 10 Tripwire/Intrusion rules per channel
Live View		- Configure Rule and Object Inspection area - Display object classification, event types, trigger time, image snapshot, and object types - Export event playback 10 seconds prior to or after event
Playback		- Search by channel, time, event type, and target type - Search event playback 10 seconds prior to or after event - Snapshot capacity: 500,000
Analytics+ Smart Motion Detection ^{4,5}		
Performance		- Detect motion based on object classification (human or vehicle) - Decreased false alarms from leaves, lights, animals - Configure functions on 16 channels, or configure functions on 8 channels to use one (1) channel of Perimeter Protection
Preview		Configure and inspect detection area
Playback		- Search by channel, time, event type, and target type - Search event playback 10 seconds prior to or after event
Interface		
Analog Camera Input		16 Channels, BNC
HDCVI		8MP, 6MP, 5MP, 4MP, 1080p at 30 fps, 720p at 60 fps, 720p at 30 fps
AHD		5MP, 4MP, 3MP, 1080p at 30 fps, 720p at 30 fps
TVI		5MP, 4MP, 3MP, 1080p at 30 fps, 720p at 30 fps
CVBS		NTSC
IP Camera Input		16+16 Channels, each channel up to 8MP
Audio		Input: Four (4) Channels, RCA Output: One (1) Channel, RCA
Two-way Talk		Audio Input Channel 1 In/ Audio Output, RCA
Recording		
Compression		AI Coding, Smart H.265+, H.265, Smart H.264+, H.264
Recording Resolution		8MP, 6MP, 5MP, 4 K-N, 4MP, 3MP, 4 M-N, 1080p, 720p, 960H, D1, CIF
Record Rate	Main Stream	8MP at 7 fps, 6MP at 10 fps, 5MP at 12 fps, 4 K-N, 4MP or 3MP at 15 fps, 4 M-N, 1080p, 720p, 960H, D1, or CIF at 30 fps
	Sub Stream	960H at 15 fps; D1, CIF, or QCIF at 30 fps
Max. Incoming Bandwidth		128 Mbps
Bit Rate		32 Kbps to 6144 Kbps per Channel
Record Mode		Manual, Schedule (Regular, Continuous), MD (Video Detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval		1 to 60 minutes (default: 60 minutes), Pre-record: 1 to 30 s, Post-record: 10 to 300 s
Audio Compression		G.711a, G.711Mu, PCM
Audio Sample Rate		8 KHz, 16 bits per Channel
Audio Bit Rate		64 Kbps per Channel

Display		
Interface		One (1) HDMI (3840 x 2160) One (1) VGA (1920 x 1080)
Spot Output		HDMI or VGA, configurable, 1920 x 1080 max resolution
Native Output Resolution	HDMI	3840 x 2160, 2560 x 1440, 1920 x 1080, 1280 x 1024, 1280 x 720
	VGA	1920 x 1080, 1280 x 1024, 1280 x 720
Maximum Playback Decoding		Eight (8) Channels of 4K at 7 fps Eight (8) Channels of 6MP at 10 fps Eight (8) Channels of 5MP at 12 fps Eight (8) Channels of 4 M-N, 1080p, 720p, 960H at 30 fps 16 Channels of 4MP, 3MP at 7 fps 16 Channels of 4 M-N, 1080p at 15 fps 16 Channels of 720p, 960H at 30 fps
Multi-screen Display		IP extension mode disabled: 1/4/8/9/16 IP extension mode enabled: 1/4/8/9/16/25/36
Fisheye Dewarp		Supported via Web Interface
On-screen Display		Camera Title, Time, Video Loss, Camera Lock, Motion Detection, Recording

Network	
Interface	One (1) RJ45 (1000 Mbps) Port
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Supports Dahua IP cameras, DVRs, NVS)
Max. User Access	128 Users
Mobile Operating System	IOS, Android
Interoperability	ONVIF 16.12, CGI Conformant

Video Detection and Alarm	
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 x 18), Video Loss, Tampering, and Diagnosis
Alarm Input	16 Channels
Relay Output	Three (3) Channels

Playback and Backup	
Playback	1/4/9/16
Search Mode	Time/Date, Alarm, MD and Exact Search (accurate to 1 second)
Playback Function	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, and Digital Zoom
Backup Mode	USB Device/Network

Storage	
Internal HDD	Two (2) SATA Ports, up to 10 TB capacity for each disk Kit ships with a 4 TB Hard Disk Drive

Auxiliary Interface	
USB	One (1) USB 2.0 Port and One (1) USB 3.0 Port
RS485	One (1) Port for PTZ Control

4. The Analytics+ functions are disabled when the additional IP channels are active.
5. The DVR is capable of processing two (2) channels of Perimeter Protection, one (1) channel of Perimeter Protection and eight (8) channels of SMD, or 16 channels of SMD at one time.

X82B3A4 Technical Specification, continued

Electrical	
Power Supply	12 VDC, 5 A
Power Consumption	< 15 W, without HDD
Construction	
Dimensions	
HDCVI DVR	1U, 375.0 mm x 278.40 mm x 53.0 mm (14.76 in. x 10.96 in. x 2.09 in.)
with PFH101 Rack Mount Tray	482.6 mm x 287.15 mm x 53.0 mm (19.0 in. x 11.31 in. x 2.09 in.)
Net Weight	1.90 kg (4.20 lb)
Gross Weight	3.20 kg (7.05 lb)
Installation	Desktop or Rack-mount

Video Transmission Distance

RG-59/U Coax	720p:	800 m (2624.67 ft)
	1080p:	500 m (1640.42 ft)
	4K/4MP:	500 m (1640.42 ft)
RG-6/U Coax	720p:	1200 m (3937.01 ft)
	1080p:	800 m (2624.67 ft)
	4K/4MP:	700 m (2296.59 ft)
CAT 6 UTP (balun required)	720p:	450 m (1476.38 ft)
	1080p:	300 m (984.25 ft)
	4K/4MP:	300 m (984.25 ft)

Environmental

Operating Conditions	−10° C to +55° C (+14° F to +131° F), 10% to 90% RH
Storage Conditions	−20° C to +70° C (−4°F to +158° F), 0% to 90% RH

Third-party Support

Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivitek, and others
---------------------	---

Certifications

Safety	UL 62368-1 EN 60950-1 IEC 60950-1
Electromagnetic Compatibility (EMC)	FCC CFR 47 Part 15 Subpart B EN 61000-3-2 EN 61000-3-3 EN 55032 EN 50130 EN 55024

Ordering Information

Type	Part Number	Description
5MP HDCVI Security System	C865E124A	
	• A51BJ02	5MP HDCVI IR 2.8 mm Fixed Lens Eyeball Camera, 16:9 Aspect Ratio (x12)
	• X82B3A4	16-Channel Penta-brid 4K 1U, 4 TB Digital Video Recorder (x1)
Camera Accessories, optional	PFA106	Mount Adapter (For use with PFB305W wall mount)
	PFA13A-E	Junction Box (For use alone or with PFA152-E pole mount)
	PFA150	Pole Mount (For use with PFA106 and PFB305W)
	PFA151	Corner Mount (For use with PFA106 and PFB305W)
	PFA152-E	Pole Mount (For use with PFB204W wall mount)
	PFA200G	Gang Box Adapter
	PFB204W	Wall Mount (For use alone or with PFA152-E pole mount)
	PFB220C	Ceiling Mont (For use with PFA106)
	PFB305W	Wall Mount (For use with PFA106)
	DH-PFM321D-US	12 VDC, 1 A Power Adapter
	DH-PFM800-4K	4K Passive HDCVI Balun
HDCVI DVR Accessory, optional	PFH101	Rack Mount Tray

Package Contents (individual devices ship with the following:)


Product	Material
HDCVI Cameras	Printed Manual Printed Regulatory Guide Plastic Wall Anchors with Screws (x3) Mounting Template
Storage Device	Quick Network Guide Printed Manual Printed Regulatory Guide Mouse Adapter Power Adapter with Power Cord Ethernet Cable, RJ45 Alarm Cable Molex Units (x3) Screws (x4)

Camera Accessories


Optional:




A51BJ02 Mounting Diagram

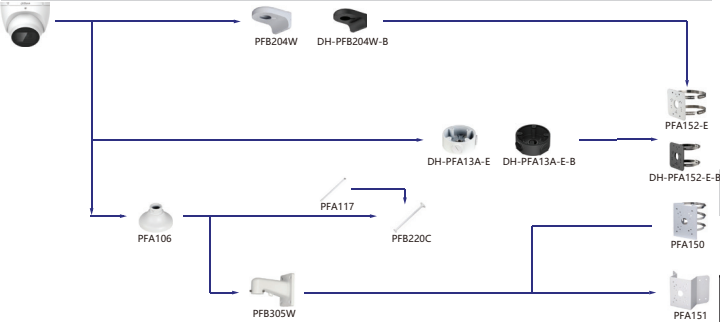


A51BJ02 Dimensions (mm/in.)

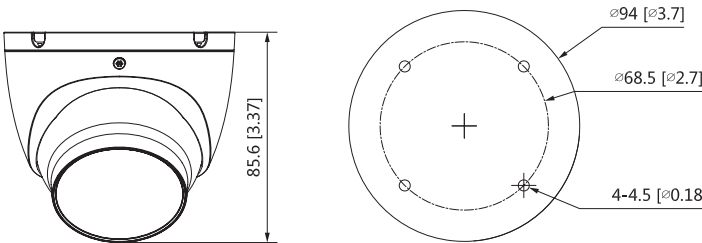

X82B3A4 Dimensions (mm/in.)

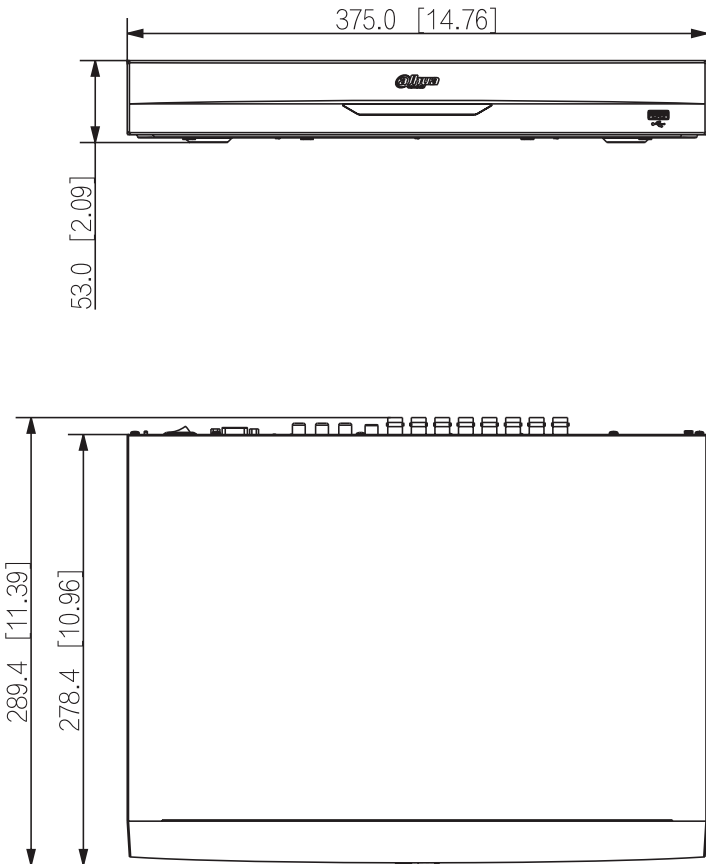

X82B3A4 Rear Panel

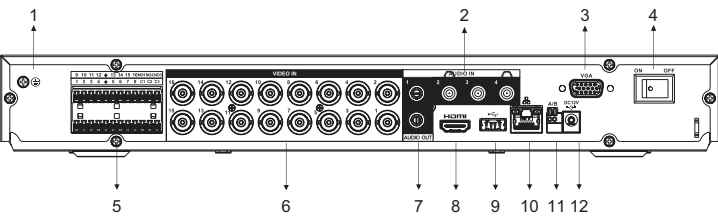

1	Ground	7	Audio Output (x1 RCA)
2	Audio Input (x4 RCA)	8	HDMI Output
3	VGA Output	9	USB Port
4	Power Switch	10	RJ45 Ethernet Port (1000 Mbps)
5	Alarm Input (x16) Alarm Output (x3)	11	RS485 Port
6	Video Input (x16 BNC)	12	Power Input