




## AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

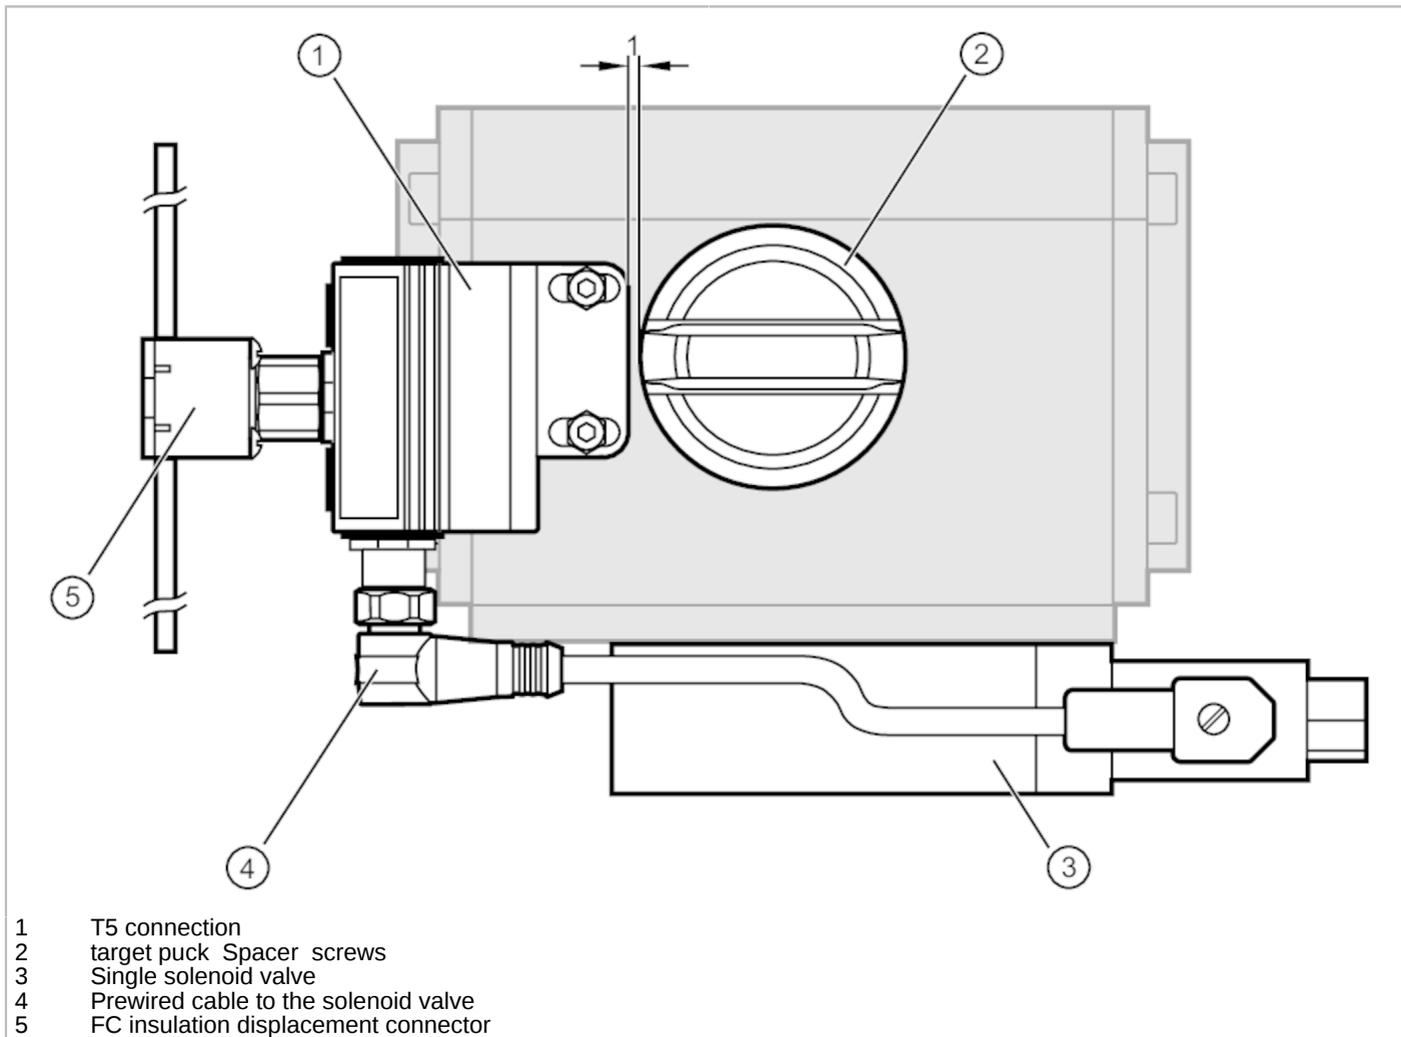

Product characteristics	
Output function	PNP
Application	
Application	direct open and close valve control
Components	Dual sensor for actuator feedback: 1, AC2316
	Single solenoid valve: 1, ZJF124
	Target puck: 1, E12517
	Silencer: 2, 780780N
	Connection cable: 1, E10844
	Flat cable insulation displacement connector: 1, E75471
Electrical data	
Max. current consumption from AS-i [mA]	160
Operating voltage AUX DC [V]	26.5...31.6; (cULus - Class 2 source required)
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 1
Inputs	
Number of digital inputs	2

# AC0019



## AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

### Outputs

Number of digital outputs	1
Output function	PNP

### AS-i classification

AS-i version	2.1
AS-i profile	S-7.A.E
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	A.E

### Mechanical data


Weight [g]	853.5
Mounting	non-flush mountable
Hole spacing [mm]	80
Shaft height of actuator stem [mm]	30

### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

#### Electrical connection - Socket



#### Outputs

3	External voltage -
4	Switching output 1 +

#### Electrical connection - plug



#### Connection

#### Connection

1	AS-i +
3	AS-i -