


# AL2203



## IO-Link input/output module

IOL MOD SL 8XMP/DX B M12 IP69K

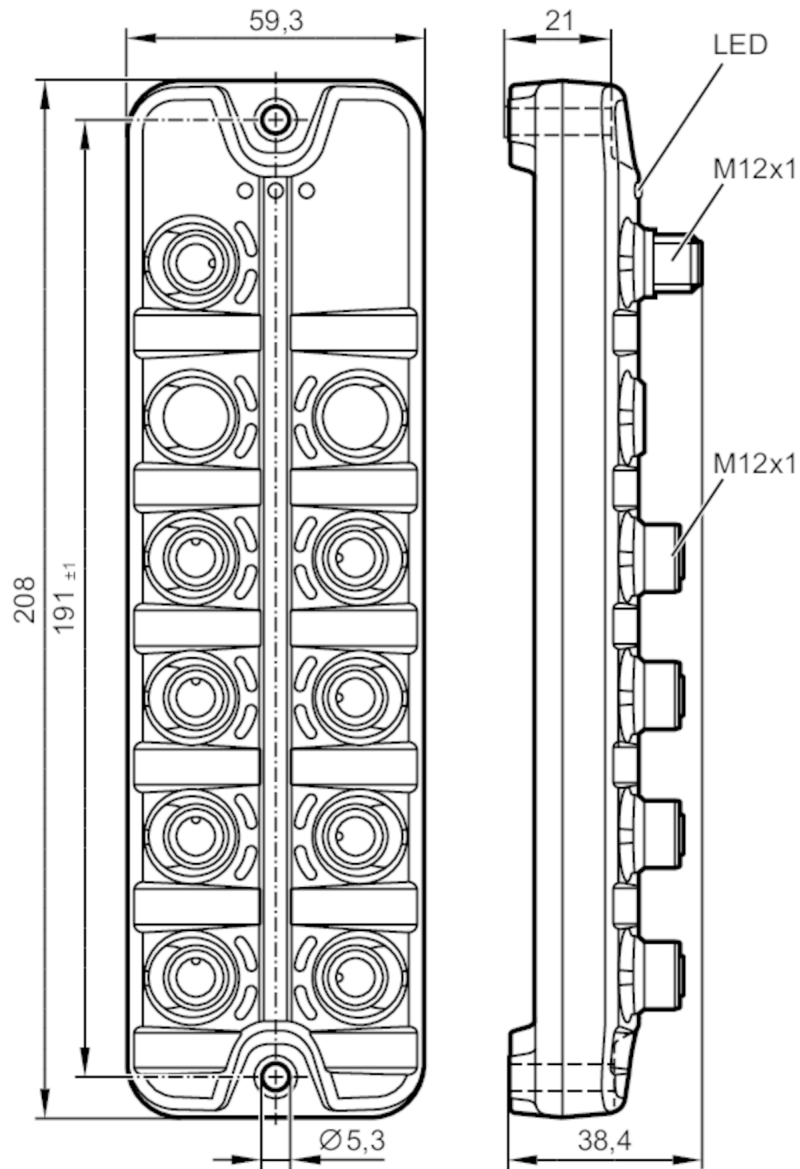

Depending on the version some LEDs are inactive



### Electrical data

Operating voltage	[V]	18...30 DC
Current consumption	[mA]	100; (US)
Protection class		III
Additional voltage supply	[V]	18...30 DC; (UA)
Max. current consumption from additional supply	[mA]	3600; (UA)

### Inputs / outputs

Total number of inputs and outputs	16
------------------------------------	----

# AL2203



## IO-Link input/output module

IOL MOD SL 8XMP/DX B M12 IP69K

Number of inputs and outputs      Number of digital inputs: 16; Number of analog inputs: 8; Number of digital outputs: 16

Inputs	
Number of digital inputs	16; (configurable)
Input circuit of digital inputs	PNP; (type 3 (IEC 61131-2))
Sensor supply of the inputs	UA
Voltage supply [V]	18...30
Input current High [mA]	2...15
Input current low [mA]	0...1.5
Switching level high [V]	11...28
Switching level low [V]	0...5
Number of analog inputs	8; (configurable current/voltage input)
Analog input (current) [mA]	4...20
Analog input (voltage) [V]	0...10
Resolution of analog input	16 Bit

Outputs	
Number of digital outputs	16; (configurable)
Max. current load per output [mA]	1800
Max. current load outputs total [A]	3.6; (max. current load per segment: 1800 mA)
Short-circuit protection	yes
Actuator supply outputs	UA

Interfaces							
Communication interface	IO-Link						
Transmission type	COM3 (230,4 kBaud)						
IO-Link revision	1.1						
SDCI standard	IEC 61131-9						
Profiles	Common - I&D      Identification and Diagnosis						
SIO mode	no						
Required master port class	B						
Min. process cycle time [ms]	4						
Supported DeviceIDs	<table border="1"> <thead> <tr> <th>Type of operation</th> <th>DeviceID</th> </tr> </thead> <tbody> <tr> <td>Acyclic parametrisation</td> <td>1406</td> </tr> <tr> <td>Factory setting: parametrisation via Pout</td> <td>1405</td> </tr> </tbody> </table>	Type of operation	DeviceID	Acyclic parametrisation	1406	Factory setting: parametrisation via Pout	1405
Type of operation	DeviceID						
Acyclic parametrisation	1406						
Factory setting: parametrisation via Pout	1405						
Note	Parameterization can be changed from cyclical to acyclical. For further information please see the IODD PDF file at "Downloads"						

Operating conditions					
Ambient temperature [°C]	-25...60				
Storage temperature [°C]	-25...70				
Max. relative air humidity [%]	90				
Max. height above sea level [m]	2000				
Protection	IP 65; IP 67; IP 69K; (operation with stainless steel protective caps: IP 69K)				
Protection rating (NEMA 250)	6P				
Degree of soiling	2				
Chemical media	<table border="1"> <tbody> <tr> <td>ISO 16750-5</td> <td>HLP, CC, DB, DC, DD, CA</td> </tr> <tr> <td>NEMA 250 5.13.1</td> <td>AA</td> </tr> </tbody> </table>	ISO 16750-5	HLP, CC, DB, DC, DD, CA	NEMA 250 5.13.1	AA
ISO 16750-5	HLP, CC, DB, DC, DD, CA				
NEMA 250 5.13.1	AA				

# AL2203



## IO-Link input/output module

IOL MOD SL 8XMP/DX B M12 IP69K

Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-3	
	IEC 61131-9	
Shock resistance	DIN EN 60068-2-27	
Vibration resistance	DIN EN 60068-2-64	
	DIN EN 60068-2-6	
MTTF	[years]	40

Mechanical data		
Weight	[g]	398.7
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	208 x 59.3 x 38.4
Material		housing: PA grey; Socket: stainless steel (1.4404 / 316L)
Sealing material		EPDM
Tightening torque	[Nm]	< 0.8


Displays / operating elements		
Display	Power	1 x LED, green
	fault	1 x LED, red
	Function	1 x LED, yellow

Accessories	
Accessories (optional)	protective cap for M12 sockets

Remarks	
Pack quantity	1 pcs.

### Electrical connection - IO-Link

Connector: 1 x M12; coding: A



X1	
1	+ 24 V DC (US)
2	+ 24 V DC (UA)
3	GND (US)
4	IO_Link
5	GND (UA)

# AL2203




## IO-Link input/output module

IOL MOD SL 8XMP/DX B M12 IP69K

### Electrical connection - inputs / outputs

Connector: 8 x M12; coding: A; sealing: EPDM



#### X1.0...X1.7

1	Sensor supply + 24 V DC (UA)
2	multifunctional input I2 Digital output O2
3	Sensor supply GND (UA)
4	digital input/output I/O1
5	not used