


AL2400



IO-Link CompactLine module

IO-Link module 4 x 2 DI IP 67

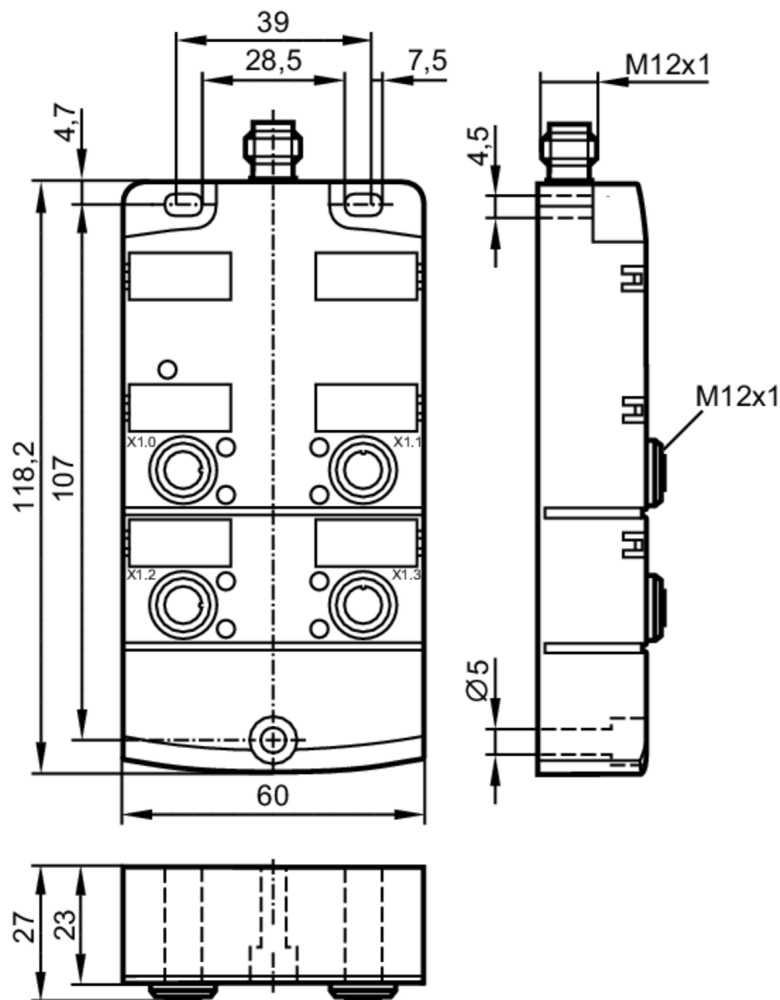

Electrical data

Operating voltage	[V]	18...30 DC; (cULus - Class 2 source required)
Current consumption	[mA]	< 50
Sensor supply US		
Current rating per port	[A]	0.1

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 8
------------------------------	-----------------------------

Inputs

Number of digital inputs	8; (4 x 2)
Input circuit of digital inputs	PNP
Sensor supply of the inputs	IO-Link
Input current limitation	[mA] 15
Input current High	[mA] 6...10
Input current low	[mA] 0...2
Switching level high	[V] > 11

AL2400



IO-Link CompactLine module

IO-Link module 4 x 2 DI IP 67

Digital inputs protected against short circuits	yes
---	-----

Interfaces

Communication interface	IO-Link	
Supported DeviceIDs	Type of operation	DeviceID
	IO-Link Device	554

IO-Link Device		
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
SIO mode	no	
Process data analog	1	
Process data binary	12	
Min. process cycle time [ms]	2.9	

Operating conditions

Ambient temperature [°C]	-25...70	
Protection	IP 67	
Protection rating (NEMA 250)	6P	
Chemical media	ISO 16750-5	AA, BA, BD, HLP, CC, DB, DC, DD, CA
	NEMA 250 5.13.1	AA

Tests / approvals

EMC	EN 61000-6-2	
	EN 61000-6-3	
	IEC 61131-9	
MTTF [years]	131	

Mechanical data

Weight [g]	300	
Housing	rectangular	
Type of mounting	Backplane mounting	
Dimensions [mm]	128.5 x 60 x 27	
Material	housing: PA; Socket: brass nickel-plated; O-ring: FKM	
Sealing material	FKM	

Displays / operating elements

Display	Power	LED, green
	errors	LED, red
	Function	LED, yellow

Accessories

Accessories (optional)	stainless steel sleeve, for installation in case of high mechanical stress , E70402
------------------------	---

AL2400



IO-Link CompactLine module

IO-Link module 4 x 2 DI IP 67

Remarks	
Remarks	For use in NFPA 79 Applications only
	The device is to be operated to IO-Link specification V1.1.2.
	The maximum cable length of the IO-Link cable is 20 m.
Pack quantity	1 pcs.

Electrical connection - IO-Link

Connector: 1 x M12; coding: A



1	UB +
2	not used
3	UB -
4	IO-Link

Electrical connection - Process connection

Connector: 4 x M12; coding: A; sealing: FKM



	Inputs X1.0...X1.3
1	Sensor supply +24 V
2	IN 2
3	Sensor supply 0 V
4	IN 1
5	not used