




Evaluation unit for speed monitoring

D200/FR1A 110-240VAC 24VDC

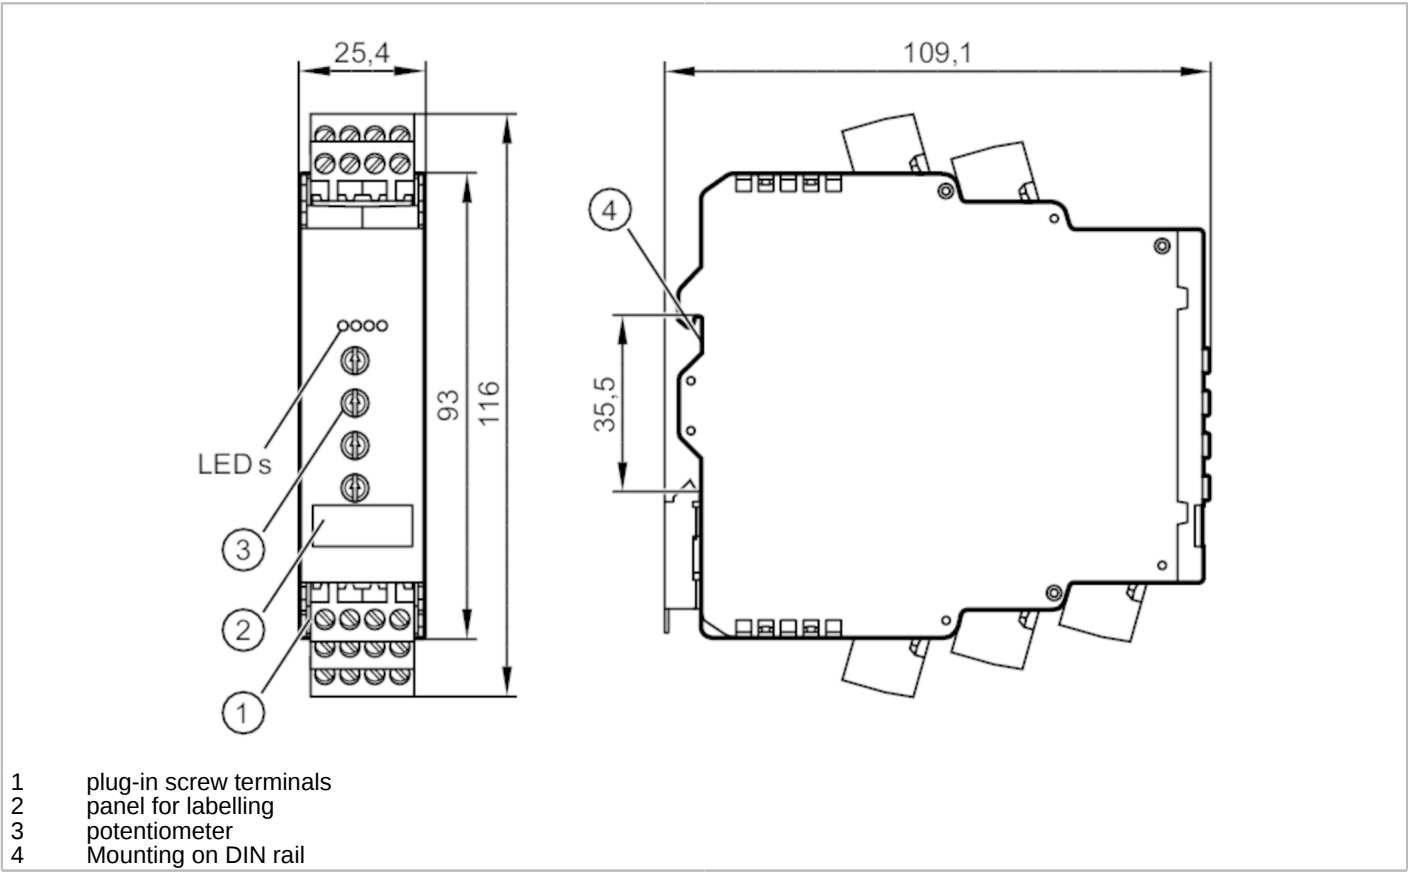

Product characteristics		
Housing		rectangular
Dimensions	[mm]	93 x 25.4 x 109.1
Application		
Design		housing for DIN rail mounting
Application		universal evaluation of pulse sequences with regard to overspeed and underspeed; Rotational speed monitoring
Electrical data		
Operating voltage tolerance 2	[%]	> 20
Nominal voltage AC	[V]	110...240
Nominal voltage DC	[V]	27
Nominal voltage tolerance	[%]	> 20
Nominal voltage tolerance 2	[%]	20...10
Nominal frequency AC	[Hz]	50...60
Insulation rating	[V]	9
Max. power consumption AC	[W]	6
Max. power consumption DC	[W]	4
Auxiliary energy for sensors DC	[V]	18.5...30; (SELV, ≤ 100 mA)
Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 1; Number of relay outputs: 1



Evaluation unit for speed monitoring

D200/FR1A 110-240VAC 24VDC

Outputs		
Number of digital outputs		1
Number of relay outputs		1
Contact rating		4 A (240 V AC); 6 A (30 V DC); (resistive load)
Short-circuit proof		yes
Measuring/setting range		
Setting range Hz	[Hz]	0.1...1000
Accuracy / deviations		
Hysteresis	[% of Sr]	1...100
Reaction times		
Start-up delay	[s]	0.1...15
Software / programming		
Adjustment of the switch point		potentiometer
Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-25...70
Max. relative air humidity	[%]	80; (40 °C: 50 % non condensing)
Max. height above sea level	[m]	2000
Protection		IP 20
Protection rating terminals		IP 20
Degree of soiling		2; ($\leq$ 240 V AC)
Tests / approvals		
Approval		UL: N001
MTTF	[years]	190
Mechanical data		
Weight	[g]	242
Housing		rectangular
Type of mounting		Mounting on DIN rail; (TH35 (EN 60715))
Dimensions	[mm]	93 x 25.4 x 109.1
Material		housing: PC-GF20
Displays / operating elements		
Display	voltage supply	1 x LED, green
	input signal	1 x LED, yellow
	Output	1 x LED, green
	Enable signal	1 x LED, yellow
Accessories		
Items supplied		connector: 5 x 4-wire, with screw connection, E40173
Remarks		
Pack quantity		1 pcs.




Evaluation unit for speed monitoring

D200/FR1A 110-240VAC 24VDC

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

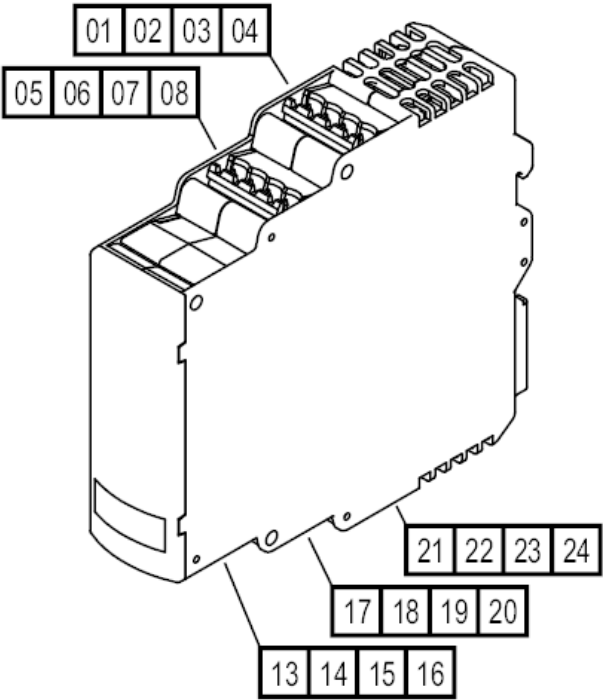

01	DC Supply voltage (+)
02	DC Supply voltage (+)
03	DC Supply voltage (-)
04	DC Supply voltage (-)
05	DC Sensor supply (+)
06	sensor signal pnp
07	DC Sensor supply (-)
08	Enable signal pnp
13	Supply transistor output (+)
14	transistor output pnp
15	common External supply (-)
16	not used
17	Relay normally open
18	Relay common
19	Relay normally closed
20	not used
21	AC Supply voltage (L)
22	AC Supply voltage (L)
23	AC Supply voltage (N)
24	AC Supply voltage (N)