


DF3210



Power supply module for electronic circuit breaker

Supply Module 24VDC/reverse

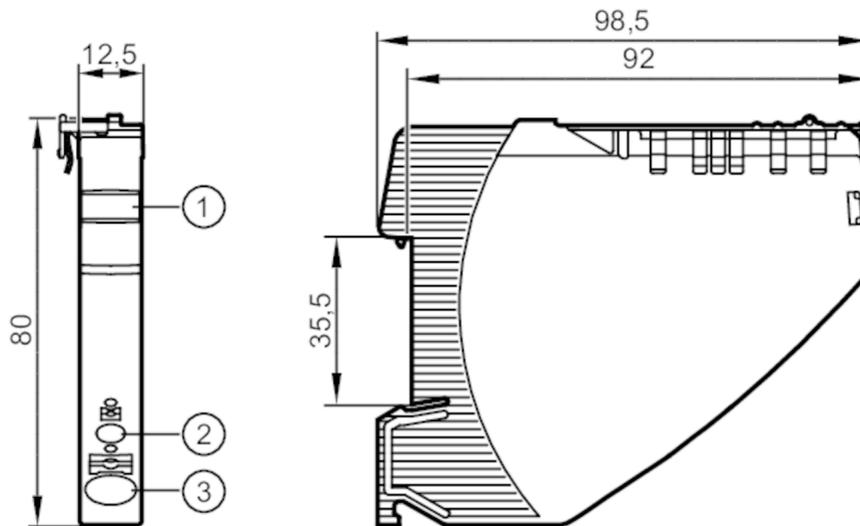

- 1 panel for labelling
- 2 push-in terminal 0 V
- 3 push-in terminal 24 V DC



Electrical data		
Operating voltage [V]	to SELV/PELV	
Nominal voltage DC [V]	24	
Input voltage DC [V]	19.2...30	
Protection class	III	
Reverse polarity protection	yes	
Mains buffering time (nominal voltage 24 V DC) [ms]	10	
Input current (nominal voltage 24 V DC) [A]	40	
Closed-circuit current [mA]	0.2	
Operating conditions		
Ambient temperature [°C]	-25...60	
Storage temperature [°C]	-40...70	
Protection	IP 20; (on the front)	
Degree of soiling	2	
Tests / approvals		
EMC	EN 61000-6-3	radiation of interference
	EN 61000-6-2	noise immunity
Mechanical data		
Weight [g]	61	
Dimensions [mm]	80 x 12.5 x 98	
Remarks		
Pack quantity	1 pcs.	

DF3210



Power supply module for electronic circuit breaker

Supply Module 24VDC/reverse

Electrical connection

push-in terminals:

contact lever/strip:

Connection

