


DI604A



Compact evaluation unit for speed monitoring

DGA4008-WRKG/IO/US/3D

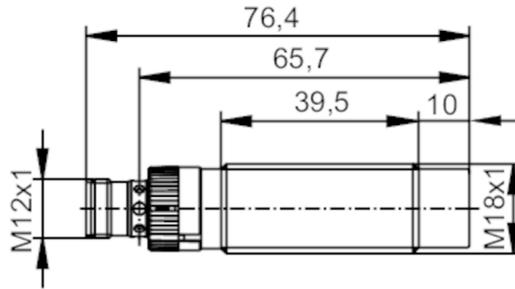

Product characteristics	
Electrical design	PNP/NPN; (configurable)
Output function	normally open / closed; (configurable)
Sensing range [mm]	8
Communication interface	IO-Link
Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 76.4
Application	
System	gold-plated contacts
Application	evaluation of rotating and linear movements with regard to underspeed; blocking
Electrical data	
Operating voltage [V]	10...30 DC
Current consumption [mA]	< 15
Protection class	II
Reverse polarity protection	yes
Outputs	
Electrical design	PNP/NPN; (configurable)
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2.5
Factory setting	Electrical design: PNP
	Output function: normally open
	Set point: 100 Imp/min
	Output OUT2: Pulse output
Short-circuit protection	yes
Overload protection	yes
Switching output (OUT1)	
Output signal	switching signal
Permanent current rating of switching output DC [mA]	250
Pulse output / Switching output (OUT2)	
Output signal	pulse signal; switching signal; (configurable)
Permanent current rating of switching output DC [mA]	100

DI604A



Compact evaluation unit for speed monitoring

DGA4008-WRKG/IO/US/3D

Switching frequency DC	[Hz]	< 500
Pulse output		external evaluation of the damping pulses
Monitoring range		
Sensing range	[mm]	8
Measuring/setting range		
Measuring range	[Imp/min]	1...32000
Setting range	[Imp/min]	3...24000
Measuring principle		inductive
Accuracy / deviations		
Correction factor		stainless steel: 0.7 / brass: 0.4 / aluminum: 0.4 / copper: 0.3
Hysteresis	[% of Sr]	10
Hysteresis	[% of Sp]	10...30
Repeatability IO-Link	[%]	1; (of the final value of the measuring range)
Temperature drift		± 10 %; (of the final value of the measuring range)
Reaction times		
Start-up delay	[s]	0...15; (In steps of: 1 s; default: 10 s)
Max. damping frequency	[Imp/min]	60000
IO-Link		
Start-up delay	[s]	0...30; (In steps of: 100 ms; default: 10 s)
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles	Smart Sensor - SSP 4.2.1	Measuring and Switching Sensor, high resolution, 1 channel
	Common - I&D	Identification and Diagnosis
	Function	Locator
	Function	ProductURI
SIO mode		yes
Required master port class		A
Min. process cycle time	[ms]	3.7
IO-Link process data (cyclical)	Function	bit length
	process value	32
	device status	4
	binary switching information	2
IO-Link functions (acyclical)		switch-on cycle counter; operating hours counter; internal temperature; application specific tag
Supported DeviceIDs	Type of operation	DeviceID
	default	1444
Note		For further information please see the IODD PDF file at "Downloads"
Operating conditions		
Ambient temperature	[°C]	-20...60
Protection		IP 67

DI604A



Compact evaluation unit for speed monitoring

DGA4008-WRKG/IO/US/3D

Tests / approvals		
Approval	BVS 17 ATEX E 112 X; IECEx BVS 17.0094X	
ATEX marking	 II 3D Ex tc IIIC T80°C Dc	
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN55011	class B
Vibration resistance	EN 60068-2-6 Fc	20 g (10...3000 Hz)
		50 sweep cycles per frequency; 1 octave per minute in 3 axes
Shock resistance	EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
Continuous shock resistance	EN 60068-2-27	41 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes
Fast temperature changes	EN 60068-2-14 Na	TA = -25°C; TB = 80°C; t1 = 30 min; t2 = <10 s 50 cycles
Salt spray test	EN 60068-2-52 Kb	severity level 5 (4 test cycles)
MTTF [years]	471	
Mechanical data		
Weight [g]	75	
Housing	Threaded type	
Mounting	non-flush mountable	
Dimensions [mm]	M18 x 1 / L = 76.4	
Thread designation	M18 x 1	
Material	housing: stainless steel (1.4404 / 316L); sensing face: PA; LED window: PEI; lock nuts: stainless steel (1.4404 / 316L)	
Tightening torque [Nm]	35	
Displays / operating elements		
Display	Power	4 x LED, green
	Switching output	4x LED, yellow
	Error message	4x LED, red
Accessories		
Items supplied	lock nuts: 2	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; coding: A; Contacts: gold-plated		
		


DI604A



Compact evaluation unit for speed monitoring

DGA4008-WRKG/IO/US/3D

Connection

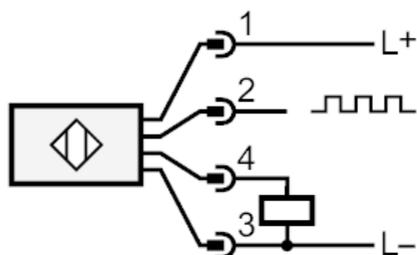

1:	L+
2:	OUT2 Pulse output / Switching output
3:	L-
4:	OUT1 IO-Link / Switching output