


DN0210



Switching amplifier

N200/SA-1 110-240VAC

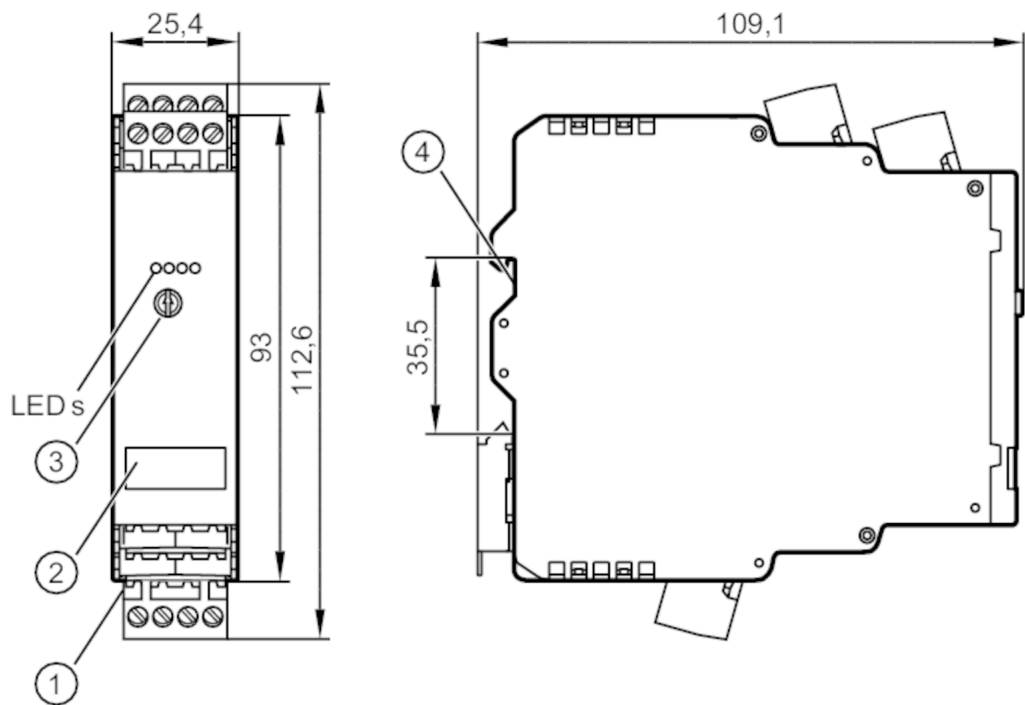

- 1 plug-in screw terminals
- 2 panel for labelling
- 3 potentiometer
- 4 Mounting on DIN rail



Product characteristics

Housing	rectangular
Dimensions [mm]	112.6 x 25.4 x 109.1

Application

Design	housing for DIN rail mounting
Application	Power supply and signal evaluation

Electrical data

Nominal voltage AC [V]	110...240
Nominal voltage tolerance [%]	> 20
Nominal voltage tolerance 2 [%]	20...10
Nominal frequency AC [Hz]	50...60
Insulation rating [V]	9
Max. power consumption AC [W]	11
Auxiliary energy for sensors DC [V]	24; (SELV, $\pm 10\%$, 300 mA)
Number of channels	1

Inputs / outputs

Number of inputs and outputs	Number of relay outputs: 1
------------------------------	----------------------------

Inputs

Input circuit of digital inputs	PNP/NPN
---------------------------------	---------

DN0210



Switching amplifier

N200/SA-1 110-240VAC

Outputs		
Number of relay outputs	1	
Contact rating	4 A (240 V AC, 24 V DC); (resistive load)	
Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...70
Max. relative air humidity	[%]	80; (40 °C: 50 % non condensing)
Max. height above sea level	[m]	3000
Protection	IP 20	
Protection rating terminals	IP 20	
Degree of soiling	2; (≤ 240 V AC)	
Tests / approvals		
MTTF	[years]	290
Mechanical data		
Weight	[g]	214
Housing	rectangular	
Type of mounting	Mounting on DIN rail; (TH35 (EN 60715))	
Dimensions	[mm]	112.6 x 25.4 x 109.1
Material	housing: PC-GF20	
Displays / operating elements		
Display	voltage supply	1 x LED, green
	Output	1 x LED, yellow
	errors	1 x LED, red
Accessories		
Items supplied	connector: 3 x 4-wire, with screw connection	
Remarks		
Pack quantity	1 pcs.	

DN0210




Switching amplifier

N200/SA-1 110-240VAC

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

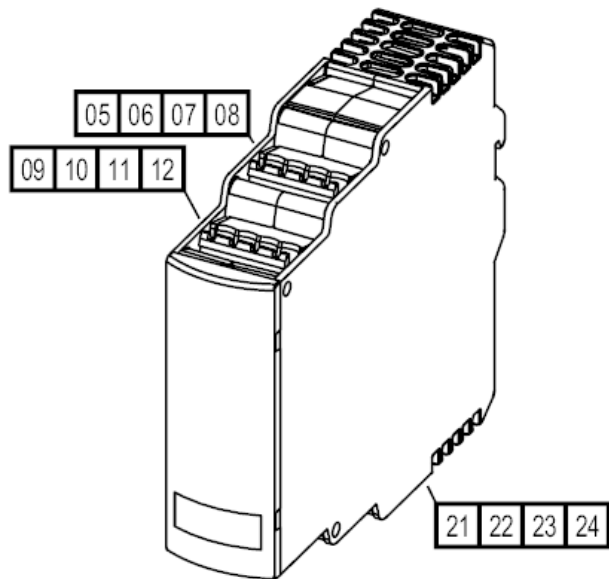

05	Relay normally open
06	Relay common
07	Relay common
08	Relay normally closed
09	DC Sensor supply (+)
10	sensor signal pnp/npn
11	not used
12	DC Sensor supply (-)
21	AC Supply voltage (L)
22	AC Supply voltage (L)
23	AC Supply voltage (N)
24	AC Supply voltage (N)