


DV2120



1-segment signal lamp

LED-Lamp/IO-Link

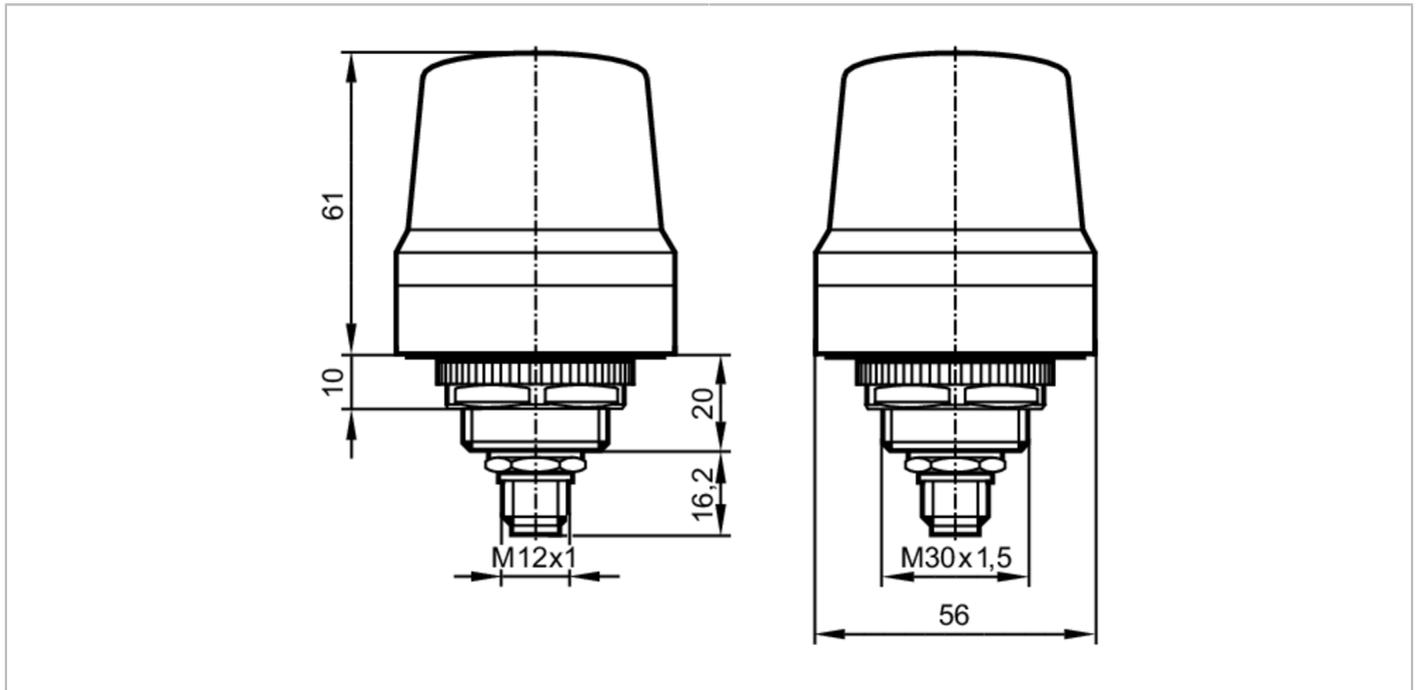

Application					
Application	signaling machine conditions				
Electrical data					
Operating voltage [V]	18...30 DC; (to SELV/PELV ; "supply class 2" to cURus)				
Nominal voltage DC [V]	24				
Current consumption [mA]	< 90				
Switch-on peak current [mA]	400				
Switch-on peak current duration [ms]	50				
Interfaces					
Communication interface	IO-Link				
Transmission type	COM2 (38,4 kBaud)				
IO-Link revision	1.1				
SDCI standard	IEC 61131-9				
SIO mode	yes				
Required master port class	A				
Min. process cycle time [ms]	8				
Supported DeviceIDs	<table border="1"> <thead> <tr> <th>Type of operation</th> <th>DeviceID</th> </tr> </thead> <tbody> <tr> <td>default</td> <td>1054</td> </tr> </tbody> </table>	Type of operation	DeviceID	default	1054
Type of operation	DeviceID				
default	1054				
Operating conditions					
Ambient temperature [°C]	-25...50				
Storage temperature [°C]	-40...75				
Max. relative air humidity [%]	90				
Max. height above sea level [m]	4000				
Protection	IP 67				

DV2120



1-segment signal lamp

LED-Lamp/IO-Link

Degree of soiling	2
-------------------	---

Tests / approvals

MTTF [years]	488
--------------	-----

Mechanical data

Weight [g]	153
Dimensions [mm]	Ø 56 / L = 61
Material	housing: ABS; lens: PC

Displays / operating elements

Display	LED segment, red / green / yellow / blue / lilac / cyan / white
---------	---

Accessories


Accessories (optional)	mounting base, E89060
	wall bracket, E89061
	Mounting adapter, E89063
	bracket with lateral cable entry, E89064
	mounting tube, E89065
	mounting tube, E89066
	mounting tube, E89067
	mounting base, E89080

Remarks

Remarks	Further information is available in the manual.
Pack quantity	1 pcs.

Electrical connection - plug

Connector: M12; coding: A



IO-Link

1	UB+
2	not used
3	UB-
4	IO-Link
5	not used

standard mode

1	IN1 red
2	IN2 green
3	GND
4	not used
5	IN3 blue




1-segment signal lamp

LED-Lamp/IO-Link

Diagrams and graphs

light intensity distribution curve

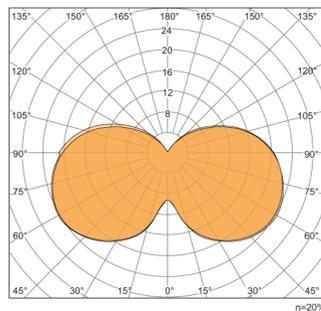


light intensity distribution curve: red

1000 lm

operating efficiency = 20%

light intensity distribution curve

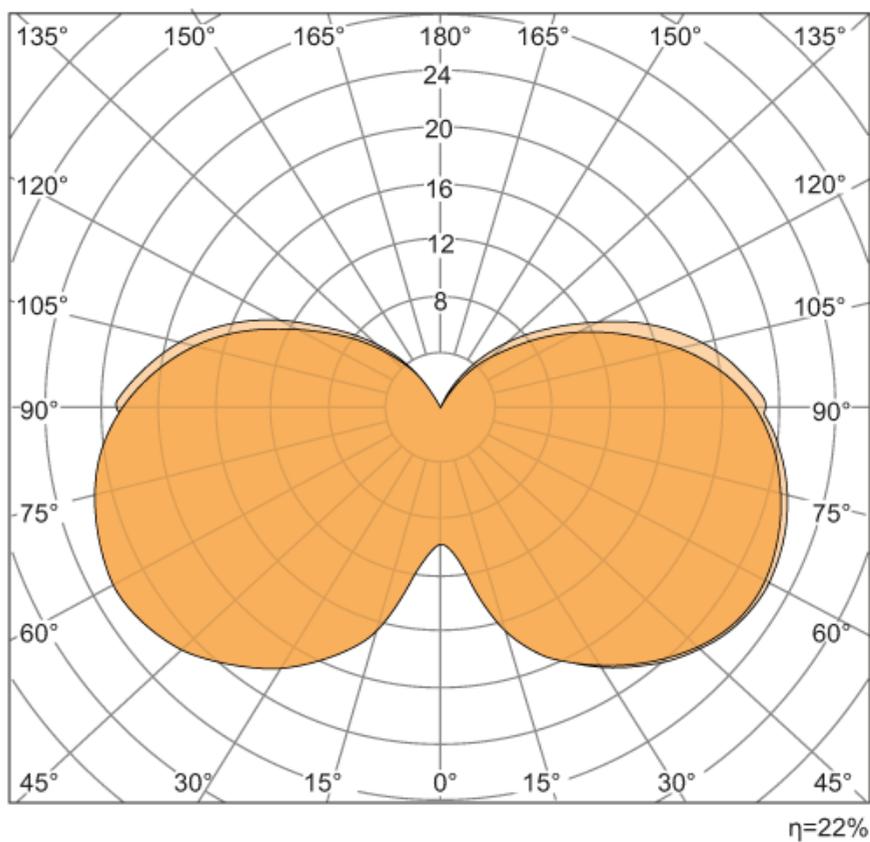

light intensity distribution curve: green

1000 lm

operating efficiency = 22%


DV2120



1-segment signal lamp

LED-Lamp/IO-Link

light intensity distribution curve

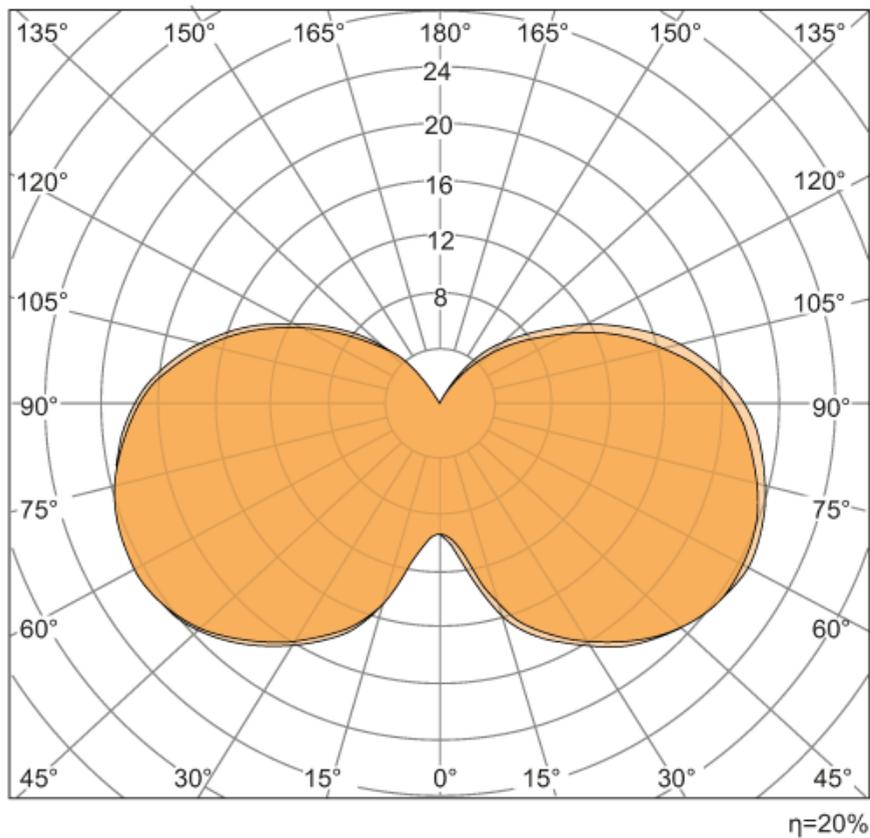

light intensity distribution curve: blue

1000 lm

operating efficiency = 20%


DV2120

1-segment signal lamp

LED-Lamp/IO-Link



base mounting

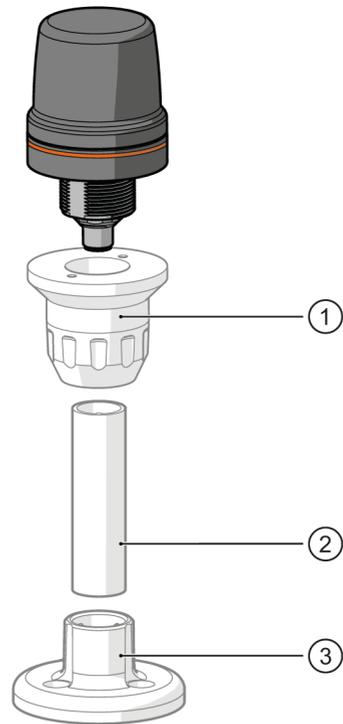


- 1 E89080 not supplied
- 2 E89065, E89066, E89067 not supplied
- 3 E89060 not supplied

DV2120

1-segment signal lamp

LED-Lamp/IO-Link

wall mounting

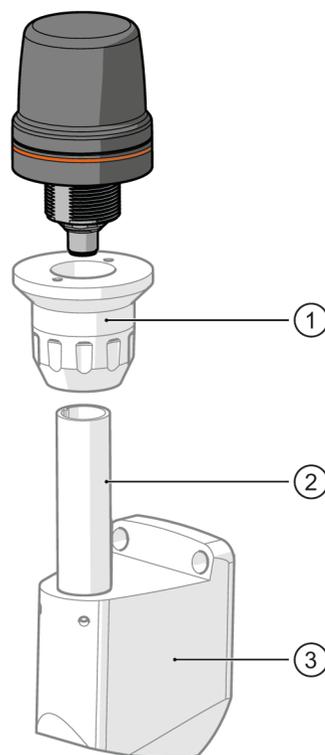

- 1 E89080 not supplied
- 2 E89065, E89066, E89067 not supplied
- 3 E89061 not supplied