


DV3003



LED segment

LED-Stack/Y-Segment

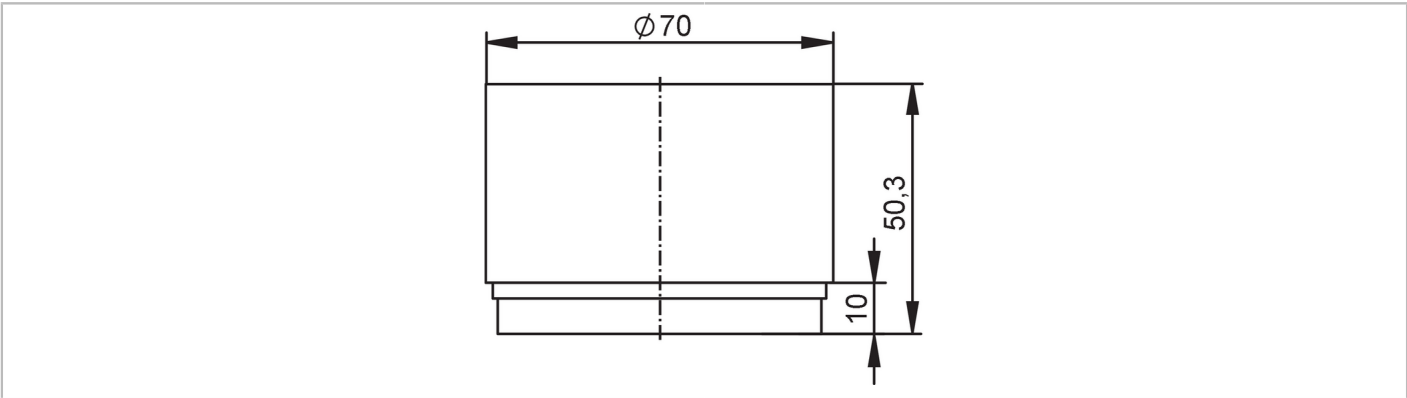

Application		
Application	signalling machine conditions	
Electrical data		
Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 45
Operating conditions		
Ambient temperature	[°C]	-20...50
Storage temperature	[°C]	-30...60
Max. relative air humidity	[%]	90
Max. height above sea level	[m]	2000
Protection		IP 65
Mechanical data		
Weight	[g]	101.6
Dimensions	[mm]	Ø 70 / L = 50.3
Materials		lens: PC
Displays / operating elements		
Display	LED segment	1 x 4 LED, yellow
Remarks		
Remarks	For further information please see the operating instructions.	
Pack quantity	1 pcs.	