




Multifunction display for monitoring revolution, speed and time

DISPLAY/FX460/ANALOG/AC/DC

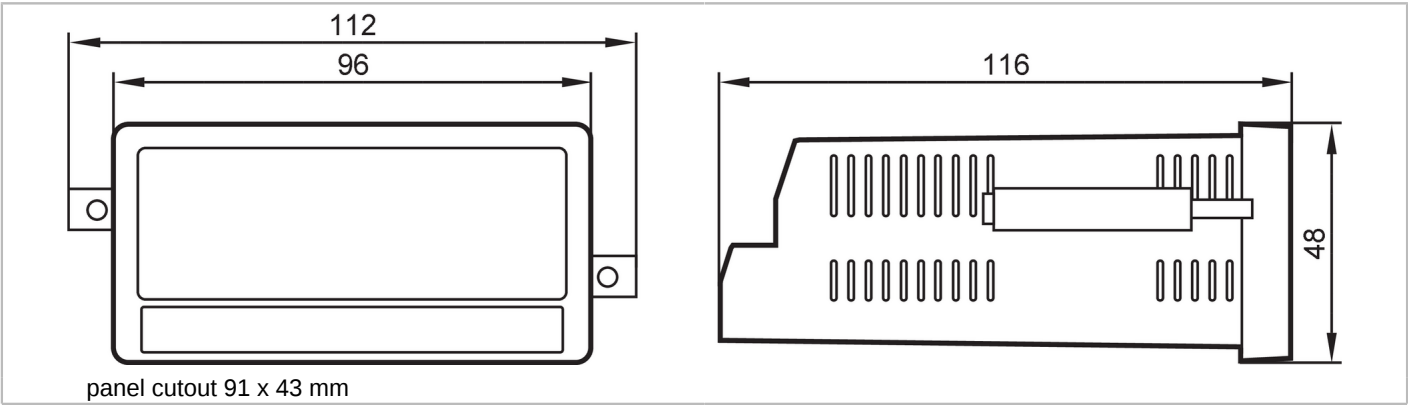


Product characteristics		
Housing		rectangular
Dimensions	[mm]	48 x 112 x 116
Application		
Application		universal evaluation and display for all physical units which can be derived from pulse sequences
Electrical data		
Frequency AC	[Hz]	50...60
Operating voltage	[V]	115...230 AC / 18...30 DC
Current consumption	[mA]	100
Inputs / outputs		
Number of inputs and outputs		Number of digital inputs: 2; Number of digital outputs: 4; Number of analogue outputs: 1
Inputs		
Number of digital inputs		2
Outputs		
Number of digital outputs		4
Number of analogue outputs		1
Analogue current output	[mA]	4...20
Max. load	[Ω]	270
Analogue voltage output	[V]	-10...10
Overload protection		yes
Operating conditions		
Ambient temperature	[°C]	-20...60
Storage temperature	[°C]	-25...70
Protection		IP 65
Protection rating terminals		IP 20
Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-3	
	EN 61000-6-4	



Multifunction display for monitoring revolution, speed and time

DISPLAY/FX460/ANALOG/AC/DC

Mechanical data		
Weight	[g]	352
Housing		rectangular
Type of mounting		installation in panels or panel cutouts; (panel cutout: 91 x 43 mm)
Dimensions	[mm]	48 x 112 x 116
Materials		housing: Noryl UL94-V-0
Displays / operating elements		
Display	colour display	full graphic LCD display, touch screen
Remarks		
Pack quantity		1 pcs.
Electrical connection		
screw terminals:		
Connection		

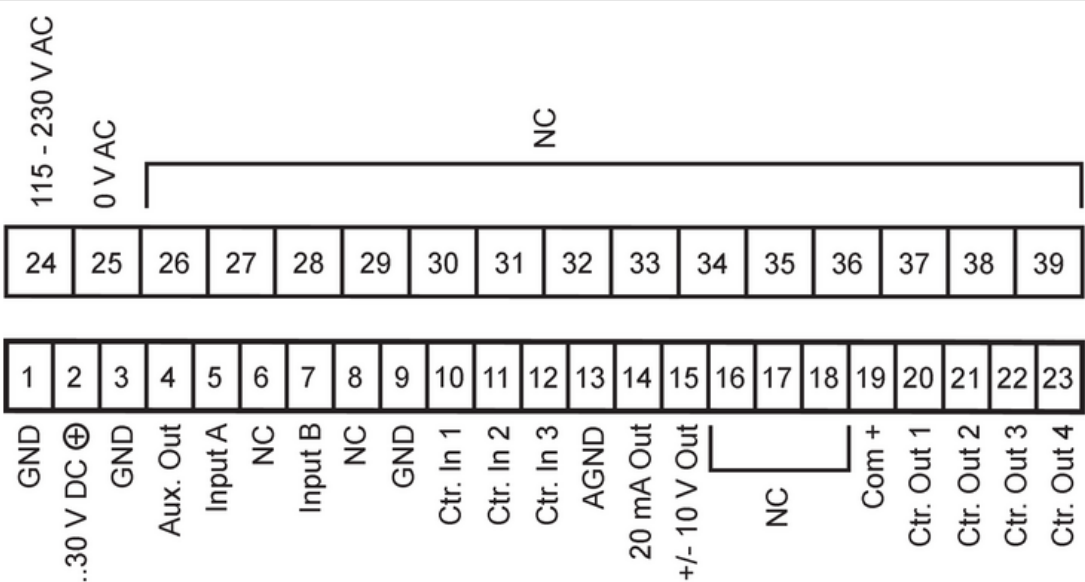

NC: not used