


# DX2032



## Multifunction display for monitoring revolution, speed and time

DISPLAY/FX460/ANALOG/DC

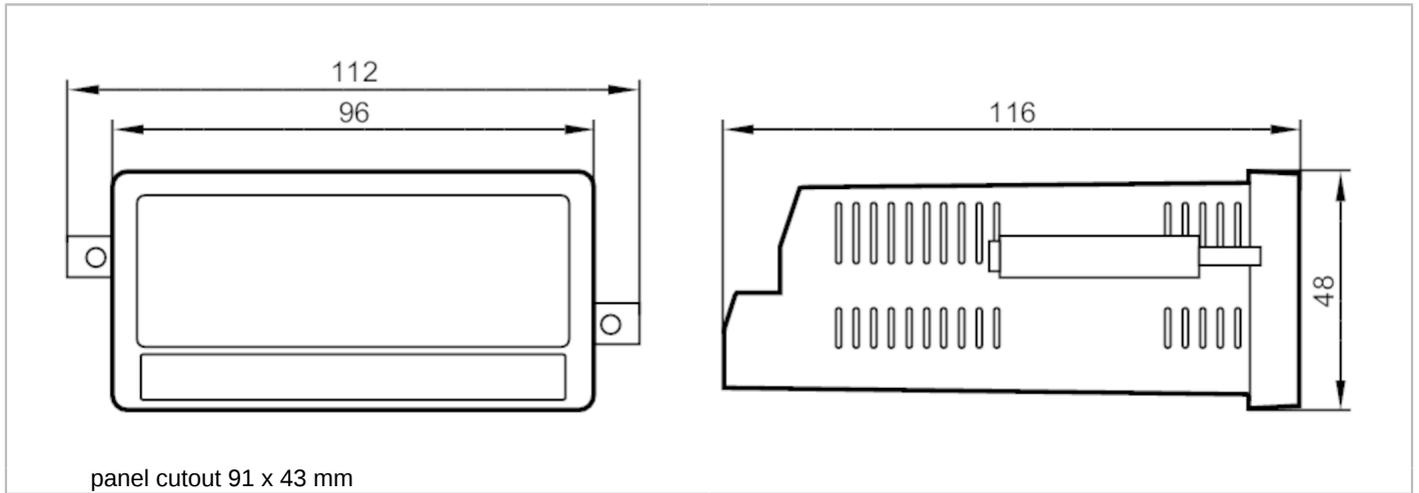

Product characteristics	
Housing	rectangular
Dimensions [mm]	48 x 112 x 116
Application	
Application	universal evaluation and display for all physical units which can be derived from pulse sequences
Electrical data	
Operating voltage [V]	18...30 DC
Current consumption [mA]	100
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 4; Number of analog outputs: 1
Inputs	
Number of digital inputs	2
Outputs	
Number of digital outputs	4
Number of analog outputs	1
Analog current output [mA]	0...20
Max. load [ $\Omega$ ]	270
Analog voltage output [V]	-10...10
Precision analog output [%]	0,1
Overload protection	yes
Resolution of analog output	16 bit
Operating conditions	
Ambient temperature [ $^{\circ}\text{C}$ ]	-20...60
Storage temperature [ $^{\circ}\text{C}$ ]	-25...70
Protection	IP 65
Protection rating terminals	IP 20

# DX2032



## Multifunction display for monitoring revolution, speed and time

DISPLAY/FX460/ANALOG/DC

### Tests / approvals

EMC	EN 61000-6-2	
	EN 61000-6-3	
	EN 61000-6-4	

### Mechanical data

Weight	[g]	302.5
Housing		rectangular
Type of mounting		installation in panels or panel cutouts; (panel cutout: 91 x 43 mm)
Dimensions	[mm]	48 x 112 x 116
Material		housing: Noryl UL94-V-0

### Displays / operating elements

Display	Color display	full graphic LCD display, Touch screen
---------	---------------	--


### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

screw terminals:

#### Connection

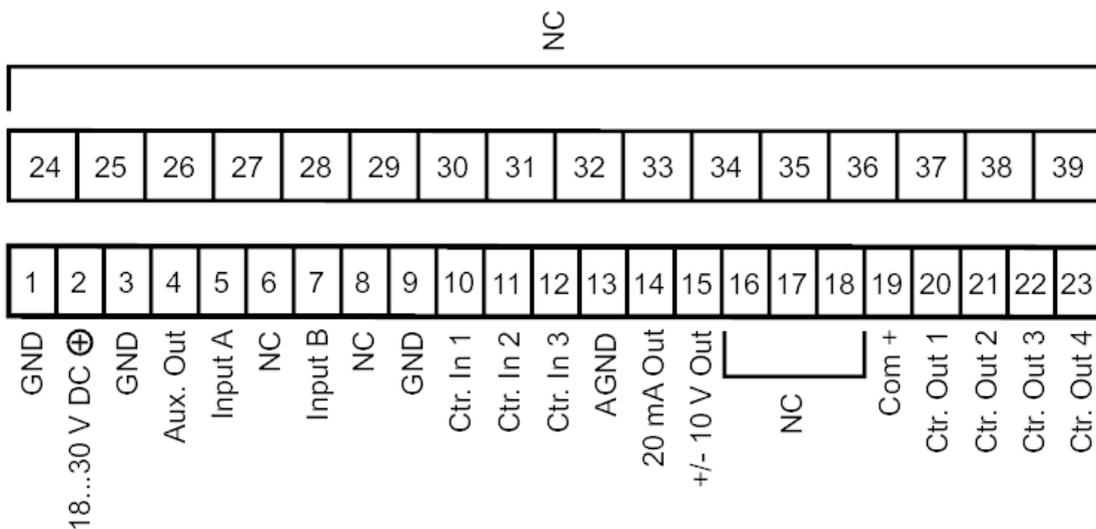

NC: not used