


E11228



Y connection cable

YDOGH080MSS0,15H08STGH040MSS

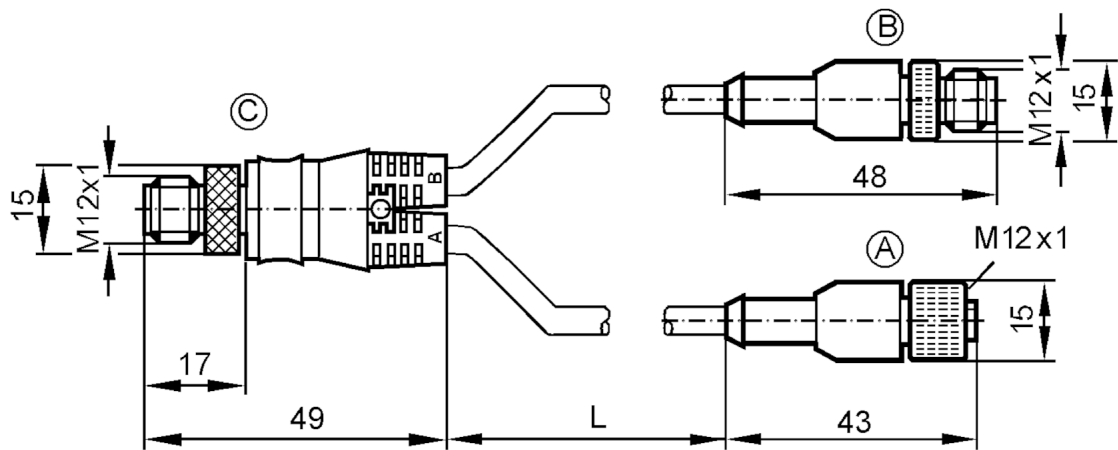

Application

System	Halogen-free
--------	--------------

Electrical data

Operating voltage	[V]	< 30 AC / < 36 DC
-------------------	-----	-------------------

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 68

Mechanical data


Weight	[g]	63
Molded-body material		PUR
Material nut		brass, nickel-plated

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - Socket A

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated






Y connection cable

YDOGH080MSS0,15H08STGH040MSS

Connection

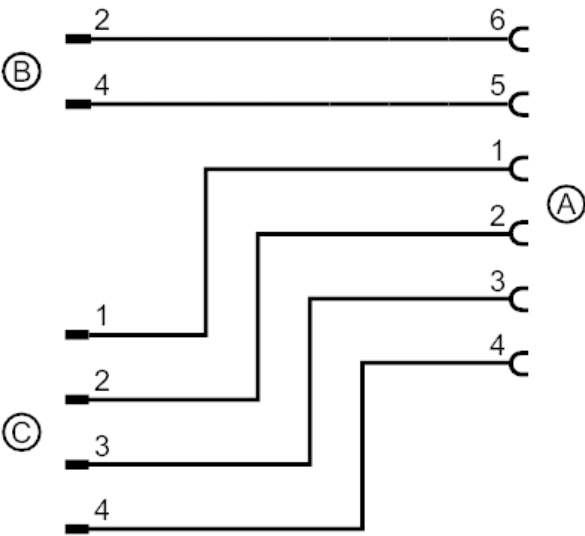

Electrical connection - plug B

Cable: 0.15 m, PUR, Halogen-free, black, Ø 6.2 mm; 2 x 0.25 mm²

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated



Electrical connection - plug C

Cable: 0.15 m, PUR, Halogen-free, black, Ø 6.2 mm; 4 x 0.25 mm²

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated

