


E11417



Patchcords with valve plug

VVDAA031MSS00,6H03STGH030MSS

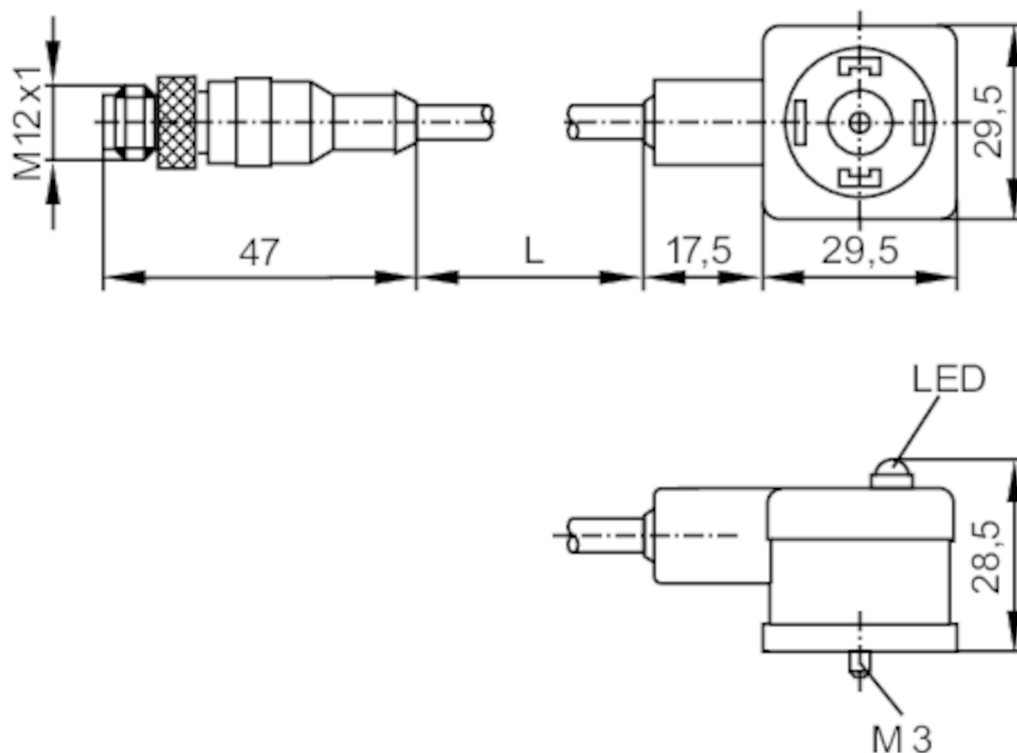

Application

System	Free from silicone; Halogen-free; gold-plated contacts
Free from silicone	yes

Electrical data

Operating voltage [V]	< 24 AC/DC
Overtoltage protection	yes; (VDR)
Max. current load total [A]	3

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 67

Mechanical data

Weight [g]	76.7
Material	housing: PUR
Molded-body material	PUR
Material nut	brass, nickel-plated

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	screw: 1 panel for labelling: 1
----------------	------------------------------------

E11417



Patchcords with valve plug


VVDAA031MSS00,6H03STGH030MSS

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug


Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm



Electrical connection

Cable: 0.6 m, PUR, Halogen-free, black, Ø 5 mm; 3 x 0.5 mm² (42 x Ø 0.1 mm)

Connection

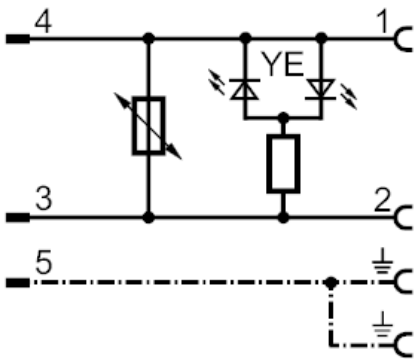

Electrical connection - Socket

Connector: 1 x valve type A DIN (EN 175301-803), angled; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: nickel-plated brass; Tightening torque: 0.7...0.9 Nm

