


## Patchcords with valve plug

VVDAC031MSS00,6H03STGH030MSS

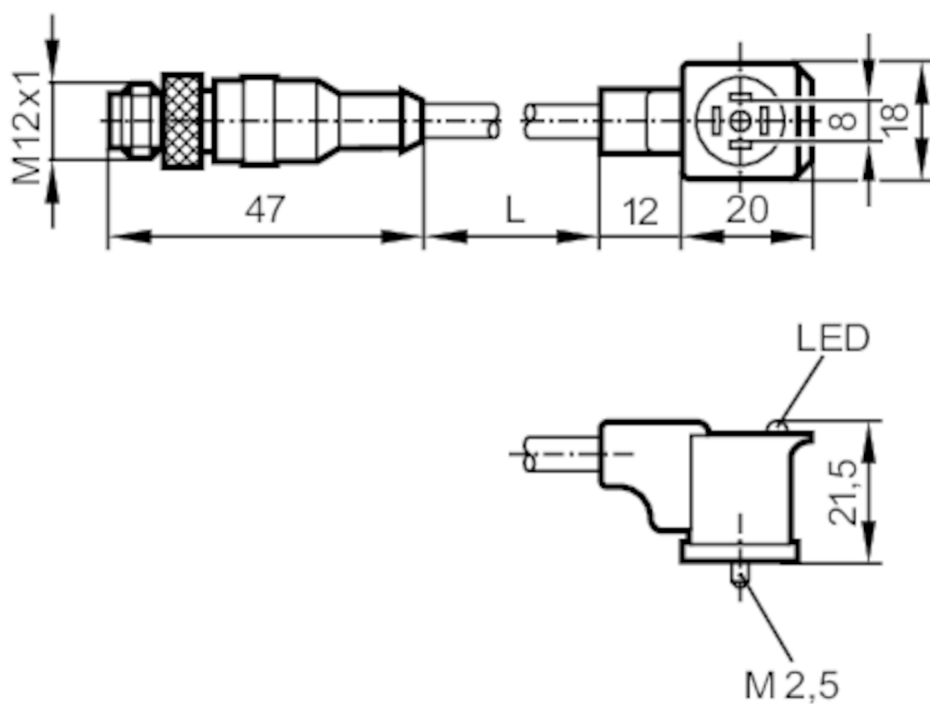

## Application

|                    |                                                        |
|--------------------|--------------------------------------------------------|
| System             | Free from silicone; Halogen-free; gold-plated contacts |
| Free from silicone | yes                                                    |

## Electrical data

|                             |            |
|-----------------------------|------------|
| Operating voltage [V]       | < 24 AC/DC |
| Overtoltage protection      | yes; (VDR) |
| Max. current load total [A] | 3          |

## Operating conditions

|                          |          |
|--------------------------|----------|
| Ambient temperature [°C] | -25...80 |
| Protection               | IP 65    |

## Mechanical data

|                      |                      |
|----------------------|----------------------|
| Weight [g]           | 59.2                 |
| Molded-body material | PUR                  |
| Material nut         | brass, nickel-plated |

## Displays / operating elements

|         |       |                 |
|---------|-------|-----------------|
| Display | Power | 1 x LED, yellow |
|---------|-------|-----------------|

## Accessories

|                |                        |
|----------------|------------------------|
| Items supplied | screw: 1               |
|                | panel for labelling: 1 |

# E11427



## Patchcords with valve plug


VVDAC031MSS00,6H03STGH030MSS

### Remarks

Pack quantity 1 pcs.

### Electrical connection - plug


Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm



### Electrical connection

Cable: 0.6 m, PUR, Halogen-free, black, Ø 5 mm; 3 x 0.5 mm<sup>2</sup> (42 x Ø 0.1 mm )

### Connection

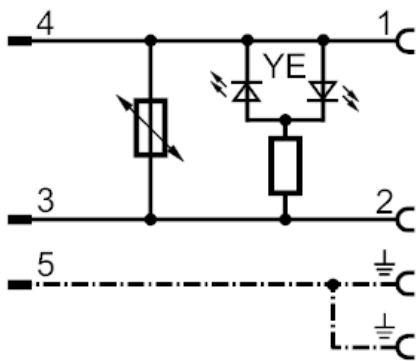

### Electrical connection - Socket

Connector: 1 x valve type C DIN, angled; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: nickel-plated brass; Tightening torque: 0.7...0.9 Nm

