


# E11552



## Female wirable connectors

SDOGF030MSSFKPG

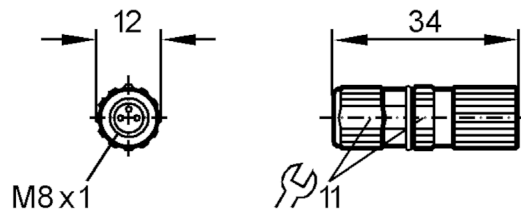

Application	
System	gold-plated contacts
Electrical data	
Operating voltage [V]	< 45 AC / < 70 DC
Protection class	III
Max. current load total [A]	4
Operating conditions	
Ambient temperature [°C]	-25...90
Protection	IP 68
Mechanical data	
Weight [g]	17.2
Material	Core insulation: PVC / TPE
Molded-body material	PA
Material nut	brass, nickel-plated
Remarks	
Pack quantity	1 pcs.

# E11552



## Female wirable connectors


SDOGF030MSSFKPG

### Electrical connection

insulation displacement technology: 0.14...0.38 mm<sup>2</sup>; Core insulation: PVC / TPE; (Ø 1.0...1.6 mm); Cable sheath: Ø 3...5 mm

### Electrical connection - Socket

Connector: 1 x M8, straight; coding: A; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated



### Connection

