


E11589



Socket with CAN bus terminating resistor

SDOGH050ZDAFKPG

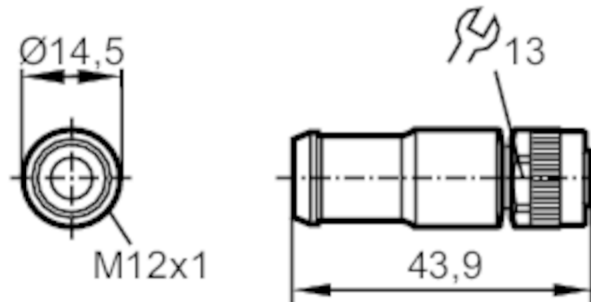

Application

Application CAN bus; for mobile applications

Operating conditions

Ambient temperature [°C] -40...85

Protection IP 68

Mechanical data

Weight [g] 7.7

Dimensions [mm] 14.5 x 14.5 x 43.9

Molded-body material TPU (urethane)

Material nut diecast zinc, nickel-plated

Sealing material FKM

Remarks

Remarks The CAN bus terminating resistor (120 Ω) is integrated in the M12 connector.

Pack quantity 1 pcs.

E11589




Socket with CAN bus terminating resistor

SDOGH050ZDAFKPG

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Moulded body: TPU (urethane); Locking: diecast zinc, nickel-plated; sealing: FKM; Tightening torque: ...0.6 Nm



Connection

