


E12068



Y-splitter with valve plug

YVDA042--S0003A03STGH050MSS

Article to be discontinued

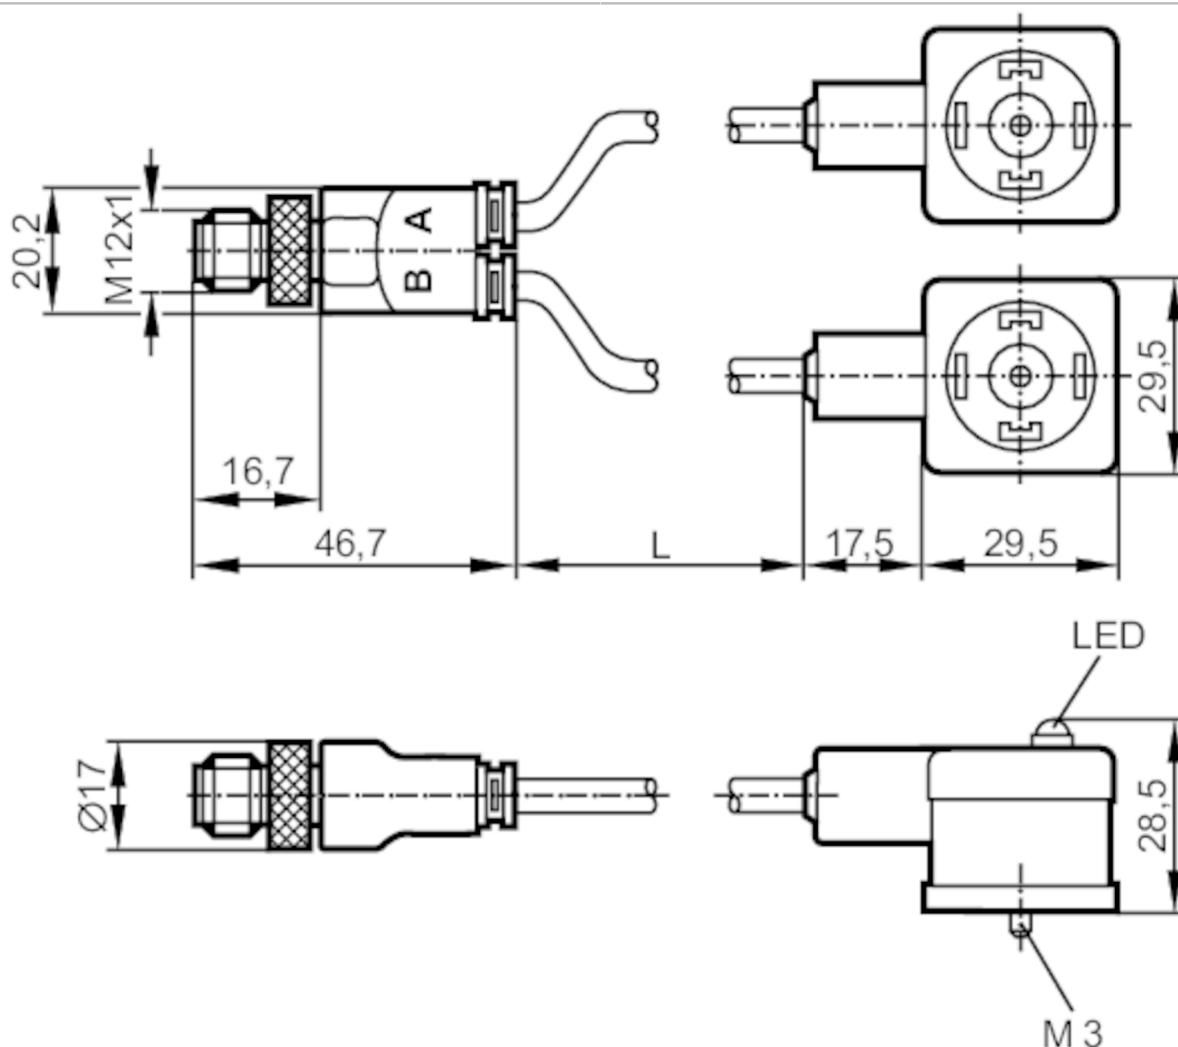

Application

System

Halogen-free

Electrical data

Operating voltage

[V]

10...30 DC

Overvoltage protection

yes; (VDR)

Operating conditions

Ambient temperature

[°C]

-25...90

Protection

IP 65

Mechanical data

Weight

[g]

350.2

Material

housing: TPU (urethane)

Molded-body material

TPU (urethane)

Material nut

brass, nickel-plated

E12068



Y-splitter with valve plug

YVDAA042--S0003A03STGH050MSS

Displays / operating elements

Display	Switching status	2 x LED, yellow
---------	------------------	-----------------

Accessories


Items supplied	screws: 2
	panel for labelling: 2

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Connection

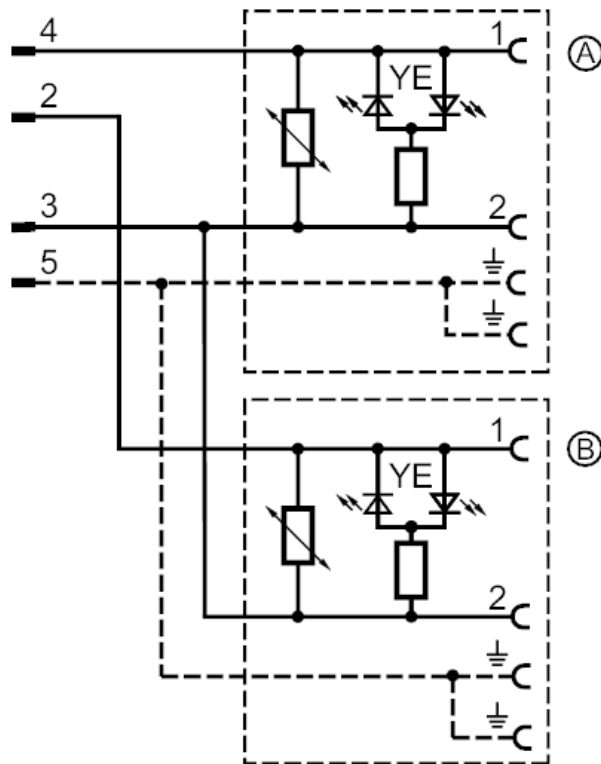

Connector: 1 x M12, straight; coding: A; Moulded body: TPU (urethane); Locking: brass, nickel-plated



E12068



Y-splitter with valve plug

YVDAA042--S0003A03STGH050MSS

Electrical connection - Socket A/B

Cable: 3 m, PUR, Halogen-free, black, Ø 4.8 mm; 3 x 0.5 mm² (16 x Ø 0.2 mm)

Connector: 2 x valve type A DIN, angled; Moulded body: TPU (urethane); Locking: brass, nickel-plated

