


E12225



Ethernet connection cable

VSTGN040ZDS0023L04STAN040ZDS

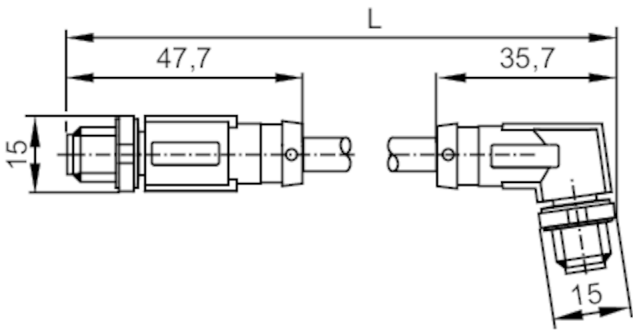

Application		
System		gold-plated contacts; screened cable
Design		Ethernet cable, D-coded
Application		Industrial applications
Electrical data		
Operating voltage	[V]	48 AC / 60 DC
Protection class		III
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 65; IP 67
Mechanical data		
Weight	[g]	1468
Dimensions	[mm]	15 x 15 x 47.7
Molded-body material		TPU (urethane)
Material nut		diecast zinc, nickel-plated
Remarks		
Pack quantity		1 pcs.

Electrical connection - plug

Connector: 1 x M12, straight; coding: D; Moulded body: TPU (urethane), black; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Tightening torque: 0.4 Nm; Shielded connection cable: shield connected



E12225




Ethernet connection cable

VSTGN040ZDS0023L04STAN040ZDS

Electrical connection

Cable: 23 m, PVC, green, Ø 6.5 mm, screened; PROFINET; 4 x 0.34 mm² (7 x Ø 0.25 mm)

Connection

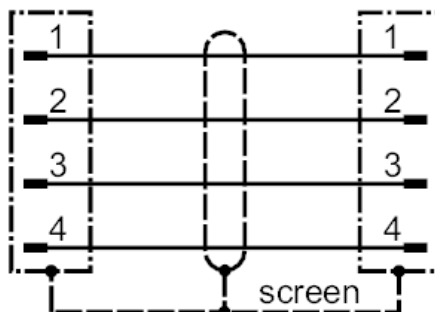

Electrical connection - plug

Connector: 1 x M12, angled; coding: D; Moulded body: TPU (urethane), black; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Tightening torque: 0.4 Nm; Shielded connection cable: shield connected

