

E12280




Connection cable

VDOGH080MSS0001H08STGH080MSS



Application	
System	Halogen-free
Electrical data	
Operating voltage	[V] < 30 AC / < 36 DC
Operating conditions	
Ambient temperature	[°C] -25...80
Protection	IP 68
Mechanical data	
Weight	[g] 94.1
Molded-body material	PUR
Material nut	brass, nickel-plated
Remarks	
Pack quantity	1 pcs.
Electrical connection - plug	

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm



E12280




Connection cable

VDOGH080MSS0001H08STGH080MSS

Electrical connection

Cable: 1 m, PUR, Halogen-free, black, Ø 6.8 mm; 8 x 0.25 mm²

Connection

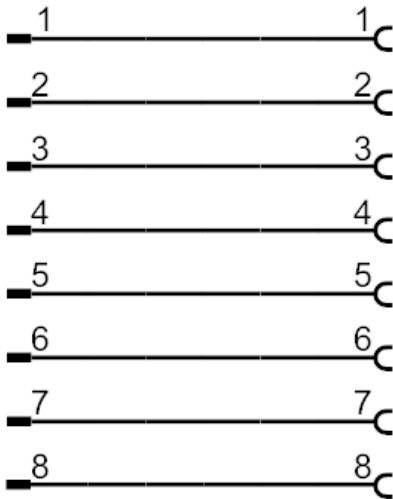

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm

