


# E12355



## Wirable plug

SSTGH040MSSFKSG

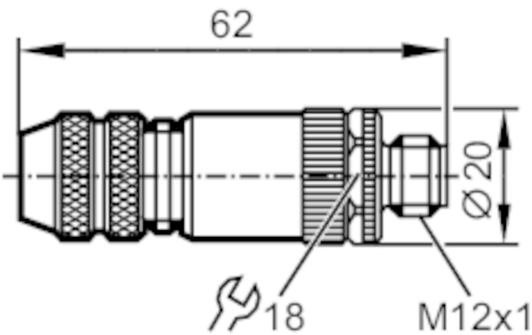

| Application             |      |                                          |
|-------------------------|------|------------------------------------------|
| System                  |      | Free from silicone; gold-plated contacts |
| Free from silicone      |      | yes                                      |
| Electrical data         |      |                                          |
| Operating voltage       | [V]  | < 45 AC / < 70 DC                        |
| Max. current load total | [A]  | 4; (...40 °C)                            |
| Operating conditions    |      |                                          |
| Ambient temperature     | [°C] | -40...85                                 |
| Protection              |      | IP 67                                    |
| Mechanical data         |      |                                          |
| Weight                  | [g]  | 44.4                                     |
| Dimensions              | [mm] | 20.2 x 20.2 x 63                         |
| Molded-body material    |      | diecast zinc, nickel-plated              |
| Material nut            |      | diecast zinc, nickel-plated              |
| Remarks                 |      |                                          |
| Pack quantity           |      | 1 pcs.                                   |

# E12355



## Wirable plug

SSTGH040MSSFKSG

### Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 6...8 mm

### Electrical connection - plug

Connector: 1 x M12, straight; coding: B; Moulded body: diecast zinc, nickel-plated; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: shieldable



### Connection

