


E12490



Ethernet connection cable

VSTGN040ZDS00,5L04STGP040--S

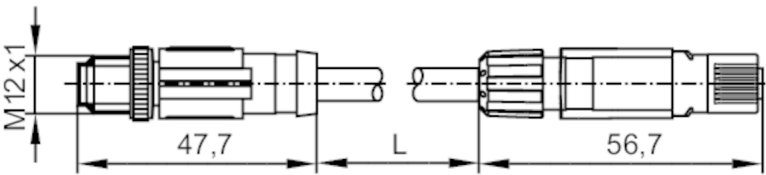

| Application             |      |                                             |
|-------------------------|------|---------------------------------------------|
| System                  |      | gold-plated contacts; screened cable        |
| Design                  |      | Ethernet cable, D-coded                     |
| Application             |      | Patch cable                                 |
| Electrical data         |      |                                             |
| Operating voltage       | [V]  | 48 AC / 60 DC                               |
| Protection class        |      | III                                         |
| Max. current load total | [A]  | 1                                           |
| Operating conditions    |      |                                             |
| Ambient temperature     | [°C] | -25...70                                    |
| Protection              |      | IP 65; IP 67; (M12 plug / RJ45 plug: IP 20) |
| Mechanical data         |      |                                             |
| Weight                  | [g]  | 73.1                                        |
| Molded-body material    |      | TPU (urethane) / PA                         |
| Material nut            |      | diecast zinc, nickel-plated                 |
| Remarks                 |      |                                             |
| Pack quantity           |      | 1 pcs.                                      |

Electrical connection - plug M12

Connector: 1 x M12, straight; coding: D; Moulded body: TPU (urethane), black; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Tightening torque: 0.4 Nm



# E12490




## Ethernet connection cable

VSTGN040ZDS00,5L04STGP040--S

### Electrical connection

Cable: 0.5 m, PVC, green, Ø 6.5 mm, screened; PROFINET; 4 x 0.34 mm<sup>2</sup> (7 x Ø 0.25 mm )

### Connection

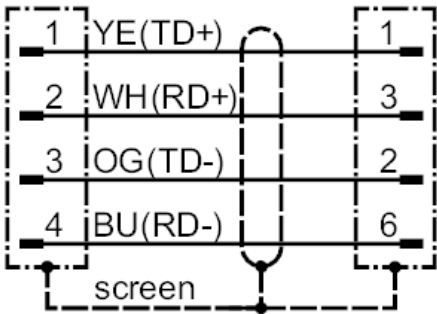

### Electrical connection - plug RJ45

Connector: 1 x RJ45, straight; Moulded body: PA; Contacts: gold-plated

