


# E12583



## Female wirable connectors

SDOGS060--AFKCR

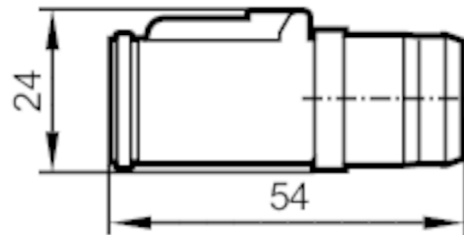

Application	
System	Free from silicone
Free from silicone	yes
Electrical data	
Operating voltage [V]	8...32 DC
Protection class	III
Max. current load total [A]	4; (...40 °C)
Operating conditions	
Ambient temperature [°C]	-40...80
Ambient temperature (moving) [°C]	-20...80
Protection	IP 67; (mating connector plugged in)
Mechanical data	
Weight [g]	15.1
Material	Contacts: brass nickel-plated; housing: PA
Remarks	
Pack quantity	1 pcs.

# E12583



## Female wirable connectors

SDOGS060--AFKCR

### Electrical connection

6 x 0.5 mm<sup>2</sup>

Connector: 1 x DEUTSCH connector (DT-06-6S-CE02)



### Connection

