


# E12613



## Connection cable

ASTGH030MSS00,5H03

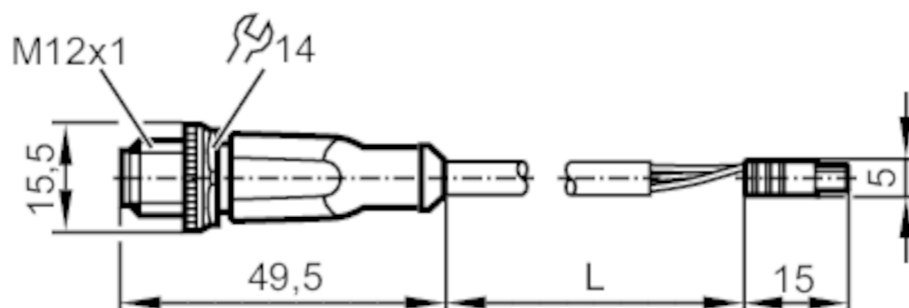

### Application

|                    |                                  |
|--------------------|----------------------------------|
| System             | Free from silicone; Halogen-free |
| Free from silicone | yes                              |

### Electrical data

|                         |     |            |
|-------------------------|-----|------------|
| Operating voltage       | [V] | < 50 AC/DC |
| Protection class        |     | II         |
| Max. current load total | [A] | 4          |

### Operating conditions

|                              |      |          |
|------------------------------|------|----------|
| Ambient temperature          | [°C] | -25...90 |
| Ambient temperature (moving) | [°C] | -25...90 |
| Protection                   |      | IP 65    |

### Mechanical data

|                      |      |                      |
|----------------------|------|----------------------|
| Weight               | [g]  | 30.5                 |
| Molded-body material |      | TPU (urethane)       |
| Material nut         |      | brass, nickel-plated |
| Tightening torque    | [Nm] | 0.6...1.5            |

### Remarks

|               |  |        |
|---------------|--|--------|
| Pack quantity |  | 1 pcs. |
|---------------|--|--------|

# E12613




## Connection cable

ASTGH030MSS00,5H03

### Electrical connection - plug


Connector: 1 x, straight; coding: A; Moulded body: TPU (urethane), orange; Locking: brass, nickel-plated



### Electrical connection

Cable: 0.5 m, PUR, Halogen-free, black, Ø 4.9 mm; 4 x 0.34 mm<sup>2</sup> (42 x Ø 0.1 mm )

### Connection

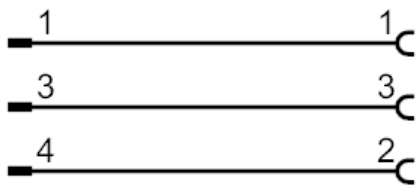

### Electrical connection - plug



1 2 3