


E12732



All male cordsets

ASTGH080VAS0010G08

For 8-wire cordsets the core colors are not standardized.
Please note the wiring of the sensor and the cordsets (see data sheet).

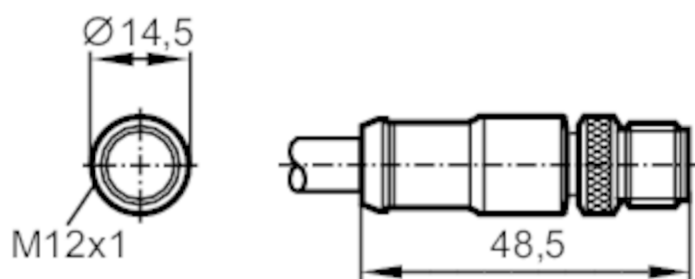

Application		
System		screened cable
Application		Washdown applications
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Protection class		III
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Mechanical data		
Weight	[g]	678.9
Dimensions	[mm]	26.5 x 15 x 38.5
Molded-body material		PVC
Material nut		stainless steel
Remarks		
Pack quantity		1 pcs.

E12732



All male cordsets


ASTGH080VAS0010G08

Electrical connection

Cable: 10 m, PVC, orange, Ø 6.6 mm, screened; 8 x 0.25 mm² (14 x Ø 0.15 mm)

Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Moulded body: PVC; Locking: stainless steel; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: shield connected



Connection



Colors to DIN 47100
Core colors :

BN =	brown
BU =	blue
GN =	green
GY =	grey
PK =	pink
RD =	red
WH =	white
YE =	yellow
screen =	screen