


# E12847



## AMP connector

SDOGX040--D0000

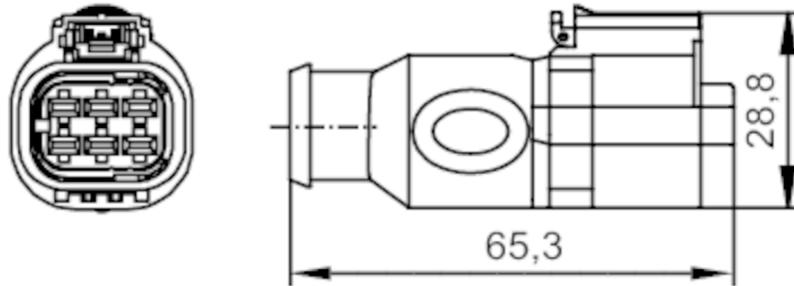

Application	
Application	for mobile applications
Electrical data	
Operating voltage [V]	12...24 DC
Protection class	III
Max. current load total [A]	16
Operating conditions	
Ambient temperature [°C]	-40...100
Ambient temperature (moving) [°C]	-15...80
Protection	IP 65; IP 67; (mating connector plugged in)
Mechanical data	
Weight [g]	31
Molded-body material	TPU (urethane), Halogen-free
Sealing material	silicone
Remarks	
Pack quantity	1 pcs.

# E12847



## AMP connector

SDOGX040--D0000

### Electrical connection - Socket

Connector: 1 x AMP connector, straight; Moulded body: TPU (urethane), Halogen-free, black; sealing: silicone



### Connection

