


E18165



Female wirable connectors

SDOGH080MSSFKPG

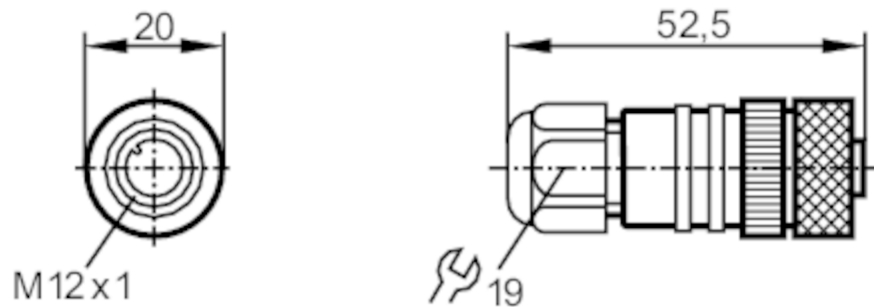

| Application | | |
|-------------------------|------|--|
| System | | Free from silicone; gold-plated contacts |
| Free from silicone | | yes |
| Electrical data | | |
| Operating voltage | [V] | < 125 AC/DC |
| Max. current load total | [A] | 4; (...40 °C) |
| Operating conditions | | |
| Ambient temperature | [°C] | -25...100 |
| Protection | | IP 68 |
| Mechanical data | | |
| Weight | [g] | 45.4 |
| Dimensions | [mm] | 20 x 20 x 52.5 |
| Molded-body material | | PA |
| Material nut | | brass, nickel-plated |
| Remarks | | |
| Pack quantity | | 1 pcs. |

E18165



Female wirable connectors


SDOGH080MSSFKPG

Electrical connection

terminals: ...0.75 mm²; Cable sheath: Ø 6...8 mm

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated



Connection

