


E18412



Connection cable

VDOGH040MSC0005X04STGH040MSC

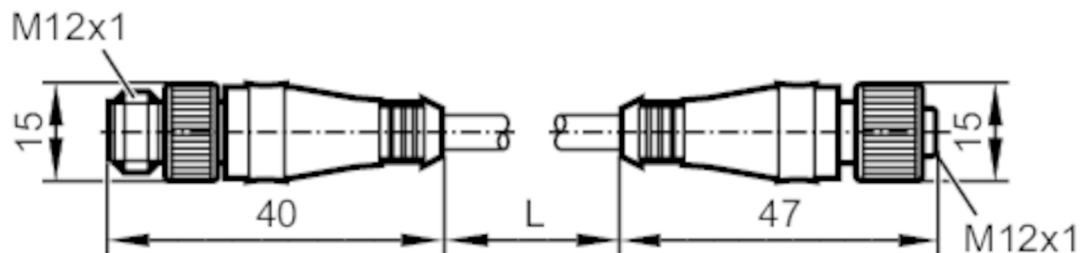

Application		
System	Free from silicone; gold-plated contacts	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 250 AC/DC
Operating conditions		
Ambient temperature	[°C]	-45...105
Protection	IP 68	
Mechanical data		
Weight	[g]	408.233
Dimensions	[mm]	15 x 15 x 40
Molded-body material	TPE	
Material nut	zinc, PTFE coated	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - plug		

Connector: 1 x M12, straight; coding: A; Moulded body: TPE, yellow; Locking: zinc, PTFE coated; Contacts: gold-plated



E18412




Connection cable

VDOGH040MSC0005X04STGH040MSC

Electrical connection

Cable: 5 m, yellow; 4 x 0.75 mm² / AWG 18

Connection

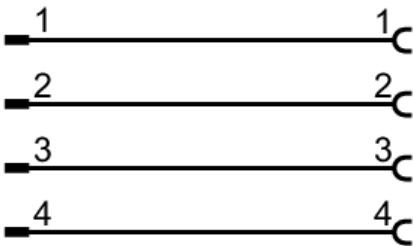

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Moulded body: TPE, yellow; Locking: zinc, PTFE coated; Contacts: gold-plated

