


E20065



Fiber optic diffuse reflection sensor

FT-00-APA-M6/S 0,5M

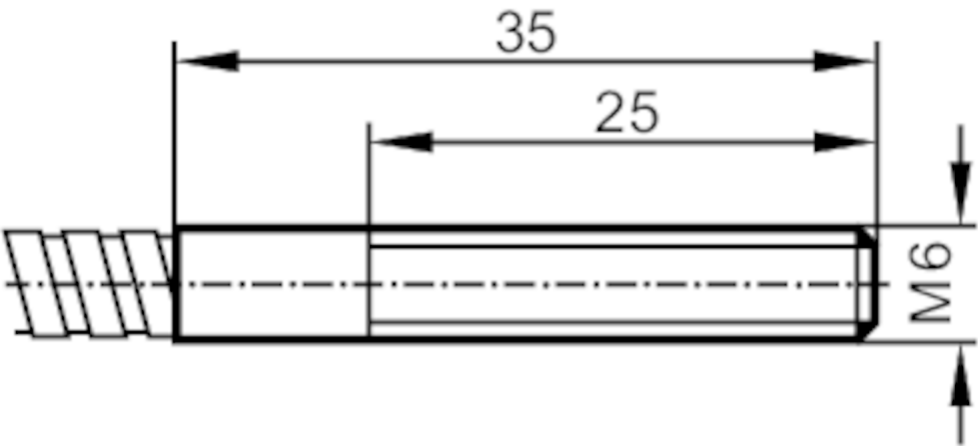

Application		
Function principle		Diffuse reflection sensor
Application		For use in industrial environments; Robust design for use in harsh industrial environments
Monitoring range		
Range with fiber optic amplifier type		OKF; OOF; OUF
OKF		
Range fiber optics	[mm]	20
OOF		
Range fiber optics	[mm]	220
OUF		
Range fiber optics	[mm]	20
Operating conditions		
Ambient temperature	[°C]	-20...80
Mechanical data		
Weight	[g]	42
Version of sensing head		straight
Sensing head thread		M6
Sensing head length	[mm]	35
Total length	[mm]	500

E20065



Fiber optic diffuse reflection sensor

FT-00-APA-M6/S 0,5M

Min. bending radius	[mm]	20; (for fixed installation)
Fiber arrangement		
Material		Adapter: ABS
Fiber material		PMMA
Fiber head material		aluminum
Fiber sheath material		aluminum
Accessories		
Items supplied		Hexagon nuts: 2 x M6, stainless steel
		tooth lock washers: 2
		Knurled nut: 1 x M11
Remarks		
Pack quantity		1 pcs.