




Fiber optic diffuse reflection sensor

FT-00-A-A-E3/1M

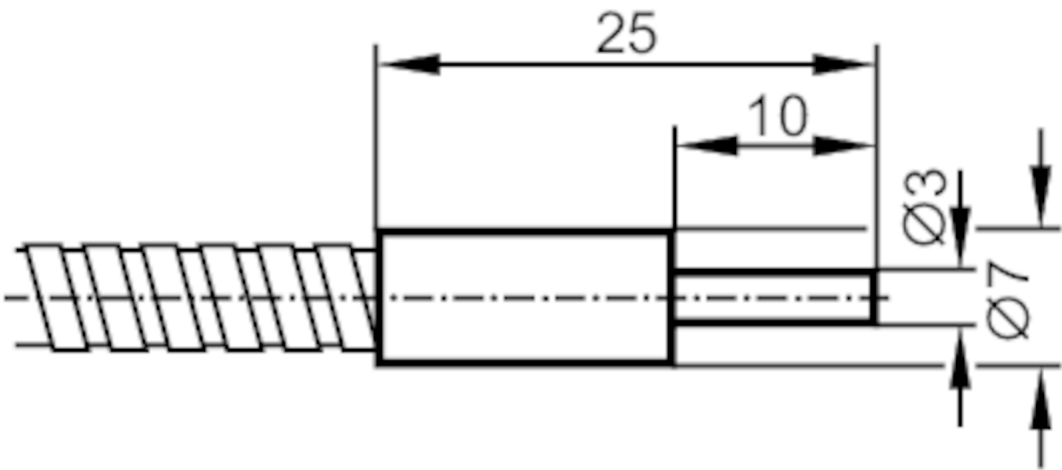

Application		
Function principle		Diffuse reflection sensor
Application		High temperature resistance; Robust design for use in harsh industrial environments
Monitoring range		
Range with fiber optic amplifier type		OKF; OOF; OUF
OKF		
Range fiber optics	[mm]	40
OOF		
Range fiber optics	[mm]	200
OUF		
Range fiber optics	[mm]	40
Operating conditions		
Ambient temperature	[°C]	-40...290
Mechanical data		
Weight	[g]	63
Version of sensing head		straight
Sensing head diameter	[mm]	3
Sensing head length	[mm]	25
Total length	[mm]	1000

E20080



Fiber optic diffuse reflection sensor

FT-00-A-A-E3/1M

Min. bending radius	[mm]	20; (for fixed installation)
Fiber arrangement		
Material		Adapter: ABS
Fiber material		glass
Fiber head material		aluminum
Fiber sheath material		aluminum
Accessories		
Items supplied		E20102
Remarks		
Pack quantity		1 pcs.