




Fiber optic diffuse reflection sensor

FT-00-P-A-M6/1M

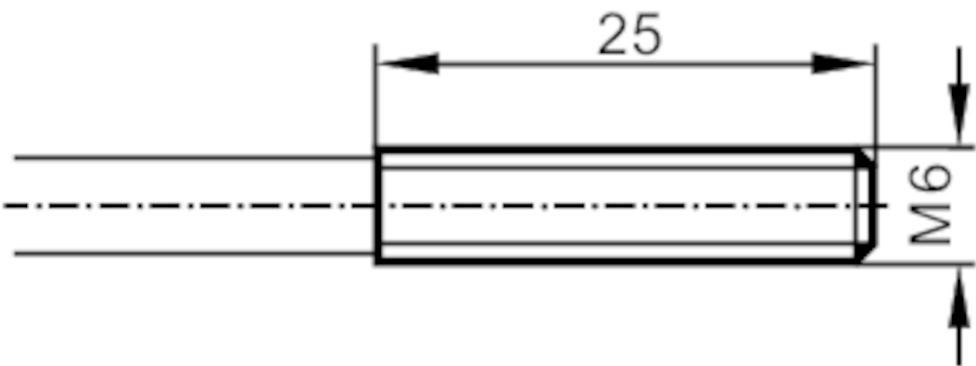

Application		
Function principle		Diffuse reflection sensor
Application		For use in industrial environments
Monitoring range		
Range with fiber optic amplifier type		OKF; OUF
OKF		
Range fiber optics	[mm]	40
OUF		
Range fiber optics	[mm]	40
Operating conditions		
Ambient temperature	[°C]	-20...80
Mechanical data		
Weight	[g]	50
Version of sensing head		straight
Sensing head thread		M6
Sensing head length	[mm]	25
Total length	[mm]	1000
Min. bending radius	[mm]	20
Fiber arrangement		Ⓢ

E20083



Fiber optic diffuse reflection sensor

FT-00-P-A-M6/1M

Material	Adapter: PPE
Fiber material	glass
Fiber head material	aluminum
Fiber sheath material	PVC
Accessories	
Items supplied	Hexagon nuts: 2 x M6, stainless steel
	tooth lock washers: 2
	Knurled nut: 1 x M11
Remarks	
Pack quantity	1 pcs.