


FE-00-M-V-R3

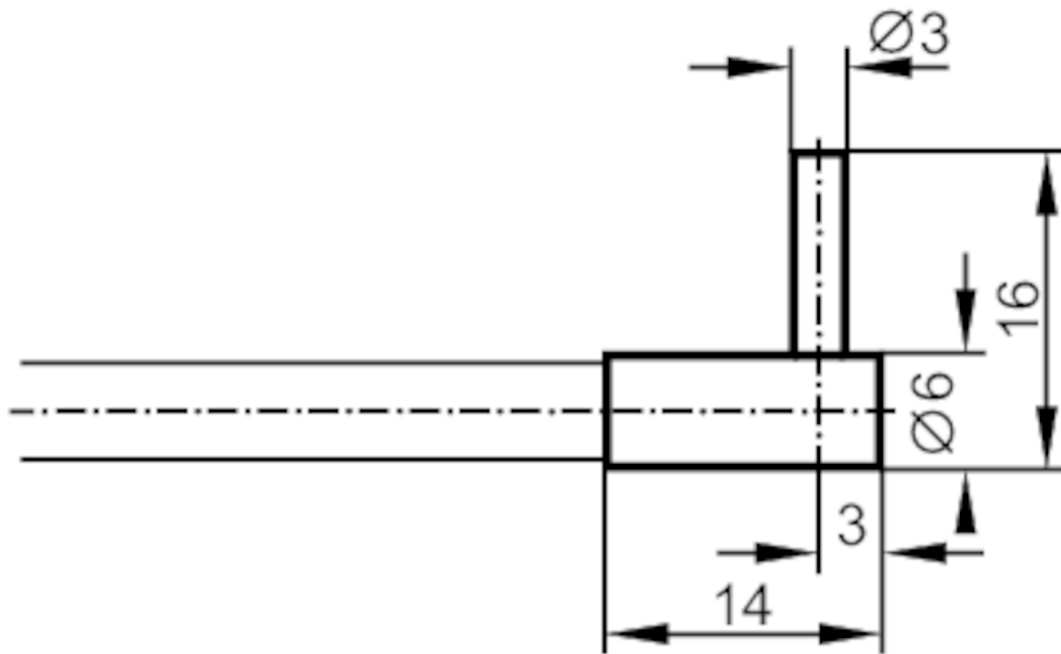

Function principle	Through-beam sensor
Application	High temperature resistance; Robust design for use in harsh industrial environments; Resistant to various aggressive chemicals

Range with fiber optic amplifier type	OKF; OOF; OUF
---------------------------------------	---------------

OKF		
Range of fiber optics	[mm]	120
OOF		
Range of fiber optics	[mm]	400
OUF		
Range of fiber optics	[mm]	120

Ambient temperature	[°C]	-20...150
---------------------	------	-----------

Weight	[g]	95.5
Version of sensing head		angled
Sensing head diameter	[mm]	3
Sensing head length	[mm]	10
Total length	[mm]	600

E20493



Fiber optic through beam sensor

FE-00-M-V-R3

Min. bending radius	[mm]	20
Fiber arrangement		
Fiber material		glass
Fiber head material		stainless steel (1.4305 / 303)
Fiber sheath material		metal silicone
Accessories		
Items supplied		Mounting clamp: 2, E20103
Remarks		
Pack quantity		1 pcs.