




Fiber optic through beam sensor

FE-11-EPA-M4/F16X0,265/2M

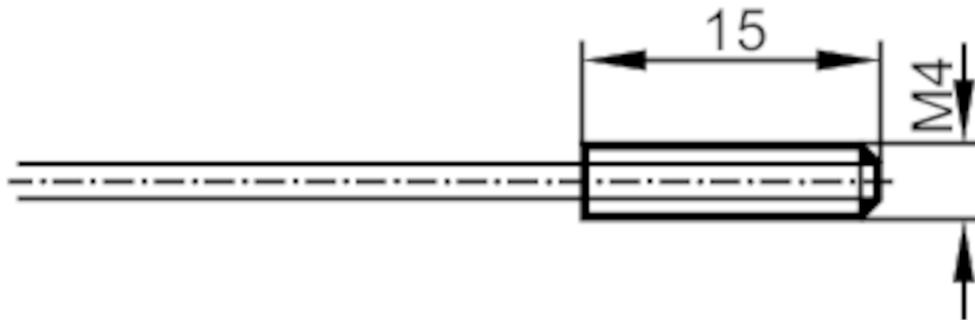

Application	
Function principle	Through-beam sensor
Application	Small bending radius
Monitoring range	
Range with fiber optic amplifier type	OB50; OBF; OCF; OO50
OB50	
Range of fiber optics [mm]	150
OBF	
Range of fiber optics [mm]	210
OCF (High Power)	
Range of fiber optics [mm]	4000
OO50	
Range of fiber optics [mm]	800
Operating conditions	
Ambient temperature [°C]	-40...70
Mechanical data	
Weight [g]	47
Version of sensing head	straight
Sensing head thread	M4

E20615



Fiber optic through beam sensor

FE-11-EPA-M4/F16X0,265/2M

Sensing head length	[mm]	15
Total length	[mm]	2000
Min. bending radius	[mm]	9
Fiber arrangement		
Core diameter	[mm]	16 x 0.25
Fiber material		PMMA
Fiber head material		aluminum
Fiber sheath material		PE

Accessories

Items supplied	Hexagon nuts: 4 x M4 tooth lock washers: 4
Accessories (optional)	Cutter for fibers:, E20600

Remarks

Pack quantity	1 pcs.
---------------	--------