




Sensing head for fiber optic through-beam sensor

FE-11-EPA-M5x30/F1x1

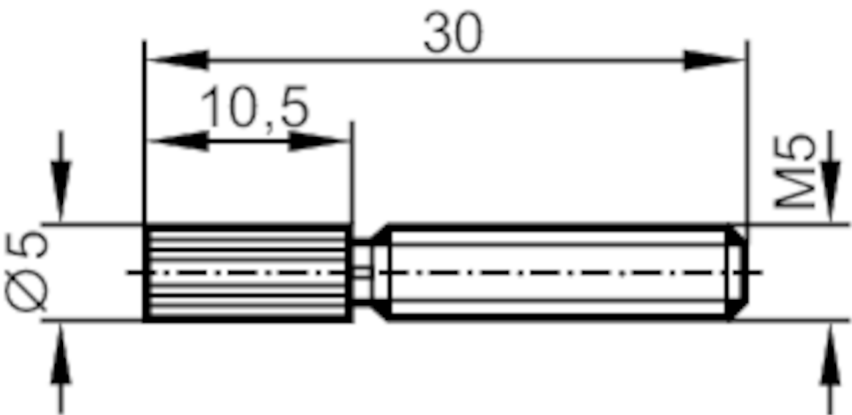

Application		
Function principle		Through-beam sensor
Application		Small bending radius
Monitoring range		
Range with fiber optic amplifier type		OB50; OBF; OO50
OB50		
Range of fiber optics	[mm]	175
OBF		
Range of fiber optics	[mm]	370
OO50		
Range of fiber optics	[mm]	700
Operating conditions		
Ambient temperature	[°C]	-40...70
Mechanical data		
Weight	[g]	8.2
Version of sensing head		straight
Sensing head thread		M5
Sensing head length	[mm]	30
Total length	[mm]	configurable

E20767



Sensing head for fiber optic through-beam sensor

FE-11-EPA-M5x30/F1x1

Fiber arrangement	
Material	housing: brass white bronze coated
Fiber material	PMMA
Fiber head material	aluminum
Accessories	
Items supplied	Hexagon nuts: 4 x M5
	washers: 4
Remarks	
Pack quantity	1 pcs.