


E21314



Fiber optic diffuse reflection sensor

FT-11-EPV-Q3/F2x1/2m

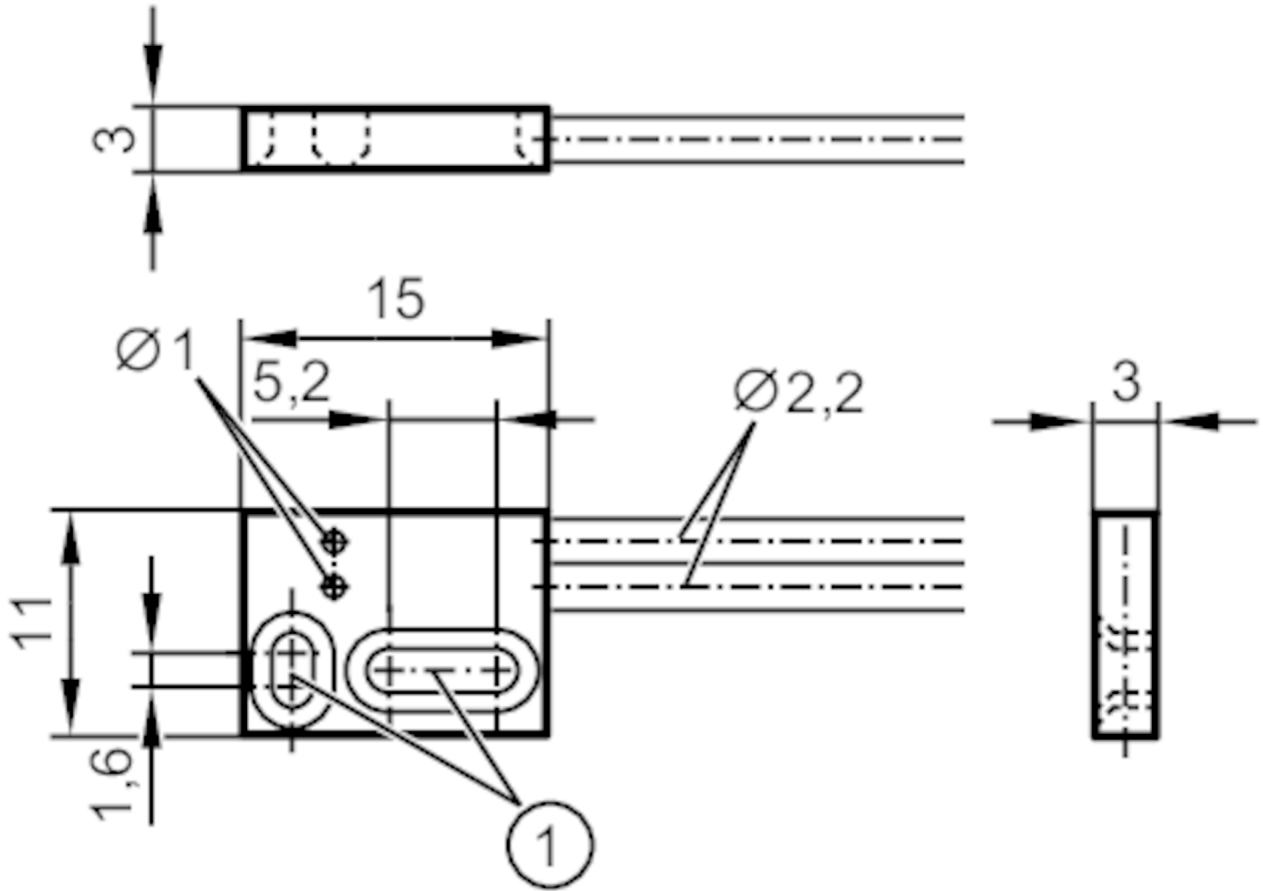

1 fixing holes

Application

Function principle	Diffuse reflection sensor
Application	For use in industrial environments

Monitoring range

Range with fiber optic amplifier type	OBF; OCF; OO50
---------------------------------------	----------------

OBF

Range of fiber optics	[mm]	25
-----------------------	------	----

OCF (High Power)

Range of fiber optics	[mm]	620
-----------------------	------	-----

0050

Range of fiber optics	[mm]	50
-----------------------	------	----

Operating conditions

Ambient temperature	[°C]	-40...70
---------------------	------	----------

Mechanical data

Weight	[g]	45
--------	-----	----

E21314



Fiber optic diffuse reflection sensor

FT-11-EPV-Q3/F2x1/2m

Version of sensing head	angled
Sensing head height [mm]	3
Sensing head width [mm]	11
Sensing head length [mm]	15
Probe dimensions [mm]	3 x 11 x 15
Total length [mm]	2000
Min. bending radius [mm]	2
Fiber arrangement	⦿
Core diameter [mm]	1
Fiber material	PMMA
Fiber head material	stainless steel (1.4305 / 303)
Fiber sheath material	PE
Accessories	
Items supplied	Hexagon nuts: 2 x M2, stainless steel
Accessories (optional)	Cutter for fibers:, E20600
Remarks	
Pack quantity	1 pcs.