


# E2M200



## Adapter cables for cameras with video output

ADAPTER CABLE M12-M16

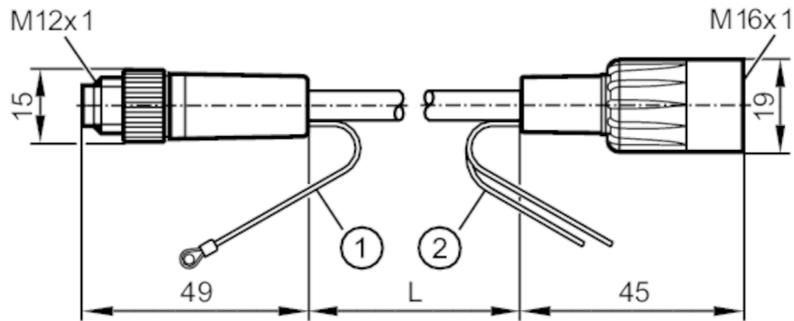

- 1 screen L= 120
- 2 voltage supply L= 250

Application	
System	Free from silicone; gold-plated contacts
Design	camera with video output O2M20x
Free from silicone	yes
Electrical data	
Operating voltage [V]	< 60 DC
Protection class	II
Max. current load total [A]	4
Operating conditions	
Ambient temperature [°C]	-45...85
Protection	IP 67
Mechanical data	
Weight [g]	72.2
Mounting thread	M16
Material	housing: PVC; sealing: EPDM
Material nut	PVC
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Cable: 0.6 m, PVC, black, Ø 6 mm; 3 x 0.34 mm <sup>2</sup> / AWG 22 + 1 x 0.11 mm <sup>2</sup> / AWG 26	
Electrical connection - Socket	
Connector: 1 x M16, straight; coding: A; Locking: PVC; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm	



# E2M200




## Adapter cables for cameras with video output


ADAPTER CABLE M12-M16

### Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Locking: PVC; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



### Connection

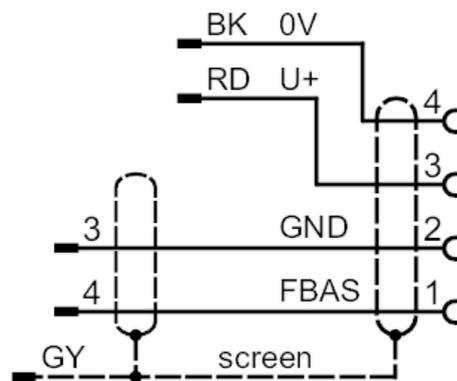

Core colors :  
BK = black  
GY = grey  
RD = red