


E2M207



Adapter cables for cameras with video output

CONNECTION CABLE M16 2M

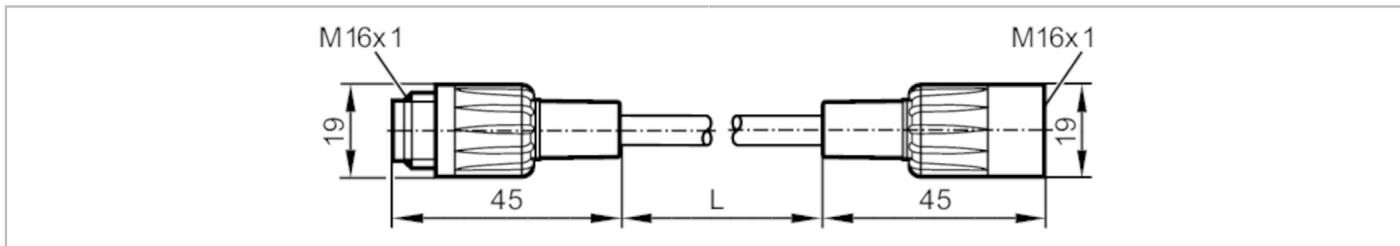

Application

| | |
|--------------------|--|
| System | Free from silicone; gold-plated contacts |
| Design | camera with video output O2M20x |
| Free from silicone | yes |

Electrical data

| | | |
|-------------------------|-----|---------|
| Operating voltage | [V] | < 60 DC |
| Protection class | | II |
| Max. current load total | [A] | 4 |

Operating conditions

| | | |
|---------------------|------|----------|
| Ambient temperature | [°C] | -45...85 |
| Protection | | IP 67 |

Mechanical data


| | | |
|--------------|-----|-----------------------------|
| Weight | [g] | 146 |
| Material | | housing: PVC; sealing: EPDM |
| Material nut | | PVC |

Remarks

| | | |
|---------------|--|--------|
| Pack quantity | | 1 pcs. |
|---------------|--|--------|

Electrical connection - plug

Connector: 1 x M16, straight; coding: A; Locking: PVC; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm



E2M207




Adapter cables for cameras with video output

CONNECTION CABLE M16 2M

Electrical connection

Cable: 2 m, PVC, black, \varnothing 6 mm; 3 x 0.34 mm² / AWG 22 + 1 x 0.11 mm² / AWG 26

Connection

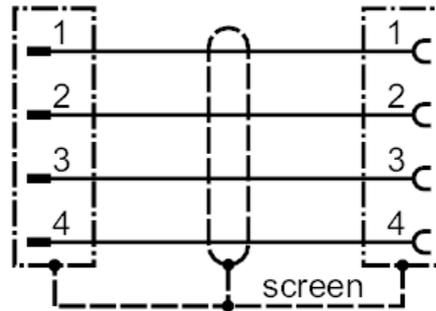

Electrical connection - Socket

Connector: 1 x M16, straight; coding: A; Locking: PVC; Contacts: gold-plated; Tightening torque: 0.6...1.5 Nm

