


E2M251



Connection cable for E2M250 multi-view box

CONNECTION CABLE M16 8P 3,85M

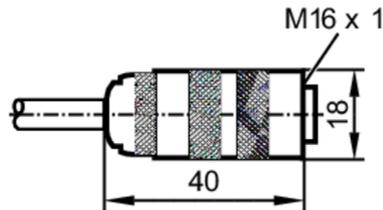

Application

System	Halogen-free; Drag chain suitability
Design	For connection of the MultiViewBox E2M250
Application	Industrial applications

Electrical data

Operating voltage	[V]	< 60 DC
-------------------	-----	---------

Operating conditions

Ambient temperature	[°C]	-45...85
Protection		IP 67

Mechanical data

Weight	[g]	322.8
Material		housing: diecast zinc; sealing: PBT
Material nut		diecast zinc
Drag chain suitability		yes
Drag chain suitability	Bending radius for fixed installation	≥ 100 mm

Remarks


Pack quantity		1 pcs.
---------------	--	--------

Electrical connection

Cable: 3.85 m, PUR, Halogen-free, black, Ø 6 mm; 7 x 0.34 mm²

Electrical connection - Socket

Connector: 1 x M16, straight; coding: A; Locking: diecast zinc



1	12 / 24 V DC red
2	GND white
3	IN 1 blue
4	IN 2 brown
5	IN 3 white/yellow
6	IN 4 grey
7	not used
8	not used